

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
SAR 13543

Total Pages in this Submission

## TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, D.C. 20231

EI418917315US

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

**FRAME-ACCURATE SEAMLESS SPLICING OF INFORMATION STREAMS**

and invented by:

**Robert Norman Hurst**

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No.: 09/347,213

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:

Which is a:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:

Enclosed are:

### Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 42 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☒ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.  
SAR 13543

Total Pages in this Submission

**Application Elements (Continued)**

3. ☒ Drawing(s) *(when necessary as prescribed by 35 USC 113)*
- a. ☐ Formal                      Number of Sheets \_\_\_\_\_
- b. ☒ Informal                      Number of Sheets 12
4. ☒ Oath or Declaration
- a. ☒ Newly executed *(original or copy)*                      ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) *(for continuation/divisional application only)*
- c. ☒ With Power of Attorney                      ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference *(usable if Box 4b is checked)*  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under  
Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby  
incorporated by reference therein.
6. ☐ Computer Program in Microfiche *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission *(if applicable, all must be included)*
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy *(identical to computer copy)*
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

**Accompanying Application Parts**

8. ☒ Assignment Papers *(cover sheet & document(s))*
9. ☒ 37 CFR 3.73(B) Statement *(when there is an assignee)*
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement/PTO-1449                      ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☐ Acknowledgment postcard
14. ☒ Certificate of Mailing
- ☐ First Class                      ☒ Express Mail *(Specify Label No.):* EI418917315US

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
SAR 13543

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☐ Certified Copy of Priority Document(s) (if foreign priority is claimed)


16. ☐ Additional Enclosures (please identify below):

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	24	- 20 =	4	x \$18.00	\$72.00
Indep. Claims	3	- 3 =	0	x \$78.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$760.00
OTHER FEE (specify purpose) Recordation Fee					\$40.00
TOTAL FILING FEE					\$872.00

- ☐ A check in the amount of \_\_\_\_\_ to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **04-0203** as described below. A duplicate copy of this sheet is enclosed.
- ☒ Charge the amount of **\$872.00** as filing fee.
- ☒ Credit any overpayment.
- ☐ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☒ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature  
**John V. Silverio**  
Attorney for Applicant  
Registration No. 34,014

Dated: *28 October 99*

cc:

**Frame-Accurate Seamless Splicing of Information Streams**

This invention was made under U.S. Government Contract 70NANB5H1174 with NIST. The Government has certain rights in the invention.

5

**CROSS REFERENCE TO RELATED APPLICATIONS**

This application is a continuation-in-part of U.S. patent application serial number 09/347,213, filed July 2, 1999 (attorney docket number 13235) and incorporated herein by reference in its entirety. This application claims the benefit of U.S. provisional patent application serial number 60/129,276,  
10 filed April 14, 1999 and incorporated herein by reference in its entirety.

The invention relates to communications systems generally and, more particularly, the invention relates to a method for splicing or concatenating information streams in a substantially seamless manner.

15

**BACKGROUND OF THE DISCLOSURE**

In several communications systems the data to be transmitted is compressed so that the available bandwidth is used more efficiently. For example, the Moving Pictures Experts Group (MPEG) has promulgated several standards relating to digital data delivery systems. The first,  
20 known as MPEG-1 refers to ISO/IEC standards 11172 and is incorporated herein by reference. The second, known as MPEG-2, refers to ISO/IEC standards 13818 and is incorporated herein by reference. A compressed digital video system is described in the Advanced Television Systems Committee (ATSC) digital television standard document A/53, and is  
25 incorporated herein by reference.

It is important to television studios and other "consumers" of information streams to be able to concatenate or splice between information streams (e.g., transport encoded program streams incorporating video, audio and other associated information sub-streams) in a substantially seamless  
30 and frame accurate manner. "Frame accurate" means that a splice occurs precisely at the frames selected by the user, regardless of the frame type of

the encoded frame (e.g., I-, P- or B-frame encoding). "Seamless splice" means a splice which results in a continuous, valid MPEG stream. Thus, a frame accurate seamless splicer will preserve an exact number of frames when performing a frame accurate seamless splice of a first information  
5 stream into a second information stream (e.g., a transport encoded program comprising a 900 video frame commercial presentation may be scheduled into a "slot" of exactly 900 frames).

Several known methods utilize variations of the following procedure: decoding an "in stream" and an "out stream" to a baseband or elementary  
10 level, performing a splice operation and re-encoding the resulting spliced stream. These methods provide frame accurate seamless splices, but at great expense.

In an improved method allowing seamless splicing at the transport stream level, MPEG and MPEG-like information streams including, e.g.,  
15 video information may be spliced together in a relatively seamless manner by defining "in-points" and "out-points" for each stream that are indicative of, respectively, appropriate stream entry and exit points. For example, a packet containing a video sequence header in an MPEG-like video stream comprises an appropriate in-point. An MPEG-like information stream that  
20 contains such in-points and out-points is said to be spliceable. The Society of Motion Picture and Television Engineers (SMPTE) has proposed a standard SMPTE 312M defining such splicing points entitled "Splice Points for MPEG-2 Transport Streams," which is incorporated herein by reference in its entirety.

25 Unfortunately, the placement of such In points and out-points is defined by factors such as image frame encoding mode, group of pictures (GOP) structure and the like. Therefore, an end user trying to seamlessly splice between information streams cannot do so in a "frame accurate" manner if the desired splicing points are not appropriate in-points or out-  
30 points.

Therefore, it is seen to be desirable to provide a method and apparatus that allows seamless, frame accurate splicing of MPEG-like

transport streams. Moreover, it is seen to be desirable to provide a method and apparatus for applying such a seamless, frame accurate splicing method and apparatus to the particular environment of a television studio or other video serving environment.

5

### SUMMARY OF THE INVENTION

The invention comprises a method and apparatus for generating universal splice point adapters, where during a splicing operation an “out-point splicing adapter” is used to transition from an exit stream, while an  
10 “in-point splicing adapter” is used to transition to an entry stream.

An out-point splicing adapter comprises an initial portion of a transition stream that terminates in a particular out-point condition. An in-point adapter comprises a remaining portion of the transition that begins with a corresponding particular in-point condition. The terminating  
15 condition of the out-point adapter and the initial condition of the in-point adapter are compatible such that any in-point adapter may be concatenated to any corresponding out-point adapter to effect a splice.

Specifically, a method according to the invention for generating a splice point adapter comprises the steps of: identifying at least one out-frame within a transport stream, said out-frame representing a last frame  
20 of said transport stream to be included in a spliced transport stream; decoding, for each identified out-frame, a respective portion of said transport stream including said out-frame; and re-encoding each decoded portion of said transport stream to produce a respective out-point adapter,  
25 each of said out-point adapters including a terminating predefined out-point condition.

### BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by  
30 considering the following detailed description in conjunction with the accompanying drawings, in which:

FIG. 1 depicts a high level block diagram of a television studio;

FIG. 2A and FIG. 2B are graphical representations of a splicing operation useful in understanding the invention;

FIG. 3 depicts an embodiment of a play to air server suitable for use in the television studio of FIG. 1;

5        FIG. 4 is a graphical representation of a splicing operating useful in understanding an embodiment of the invention;

FIGS. 5 and 6 depict tabular representations of image frame display order and image frame transmission orders useful in understanding the invention;

10        FIG. 7 depicts a flow diagram of a method for generating a transition stream or transition clip;

FIG. 8 depicts a flow diagram of a method of determining which information frames within a from-stream should be included within the transition stream;

15        FIG. 9 depicts a flow diagram of a method for determining which information frames within a to-stream should be included within the transition stream;

FIG. 10 depicts a flow diagram of a method for indexing an information stream;

20        FIG. 11 depicts a tabular representation of a meta file suitable for use in the play to air server of FIG. 3; and

FIG. 12 depicts a flow diagram of a method for generating in-point adapters and out-point adapters.

25        To facilitate understanding, identical reference numerals have been used, where possible, to designate identical elements that are common to the figures.

### DETAILED DESCRIPTION

30        After considering the following description, those skilled in the art will clearly realize that the teachings of the invention can be readily utilized in any information processing system in which a need exists to perform

seamless, frame accurate splicing of, e.g., MPEG-like transport streams including video sub-streams.

An embodiment of the invention will be described within the context of a television studio environment where a play to air controller causes  
5 stored video streams (e.g., video segments or “clips”) to be retrieved from a server and spliced together in a seamless, frame accurate manner to produce, e.g., an MPEG-2 compliant video stream suitable for transporting to a far end decoder. However, since the scope and teachings of the invention have much broader applicability, the invention should not be  
10 construed as being limited to the disclosed embodiments. For example, the invention has applicability to server-based asset streaming for cable headends, insertion of local commercials and trailers for digital cinema, frame accurate Internet-based streaming of MPEG-2 transport streams and limited production facilities (i.e., those production facilities performing only  
15 the composition of segments for news or other applications).

Throughout this description various terms are used to describe the invention. Unless modified by the following description, the several of the terms are defined as follows: A spliced stream comprises a stream formed by concatenating an exit-stream (or from-stream) to an entry-stream (or  
20 to-stream) at a particular splicing point. An exit-frame is the last frame of an exit-stream. An entry frame is the first frame of an entry-stream.

FIG. 1 depicts a high level block diagram of a television studio. Specifically, the studio of FIG. 1 comprises a play to air server 110, a mass storage device 115, a play to air controller 120, a router 130 and a network  
25 interface device (NID) 140.

The mass storage device 115 is used to store a plurality of, illustratively, MPEG-2 transport streams including encoded video sub-streams and associated audio streams providing a program. The mass storage device 115 may also be used other types of information streams,  
30 such as packetized or non-packetized elementary streams comprising video data, audio data, program information and other data.



The play to air server 110 retrieves, via signal path S1, information streams from the mass storage device 115. The retrieved information streams are processed, in response to a control signal produced by the play to air controller 120 (e.g., a play list) to produce an output transport stream comprising a plurality of concatenated transport streams. The play to air server 110 provides the output transport stream and is coupled to the router 130 via signal path S2.

The play to air controller 120 provides control information to the play to air server 110 and other studio equipment (not shown) via a signal path S3, which is coupled to the router 130. The router 130 is used to route all control and program information between the various functional elements of the television studio 100. For example, control information is passed from the play to air controller 120 via signal path S3 to the router 130, which then passes the control information to the play to air server 110 via signal path S2. Optionally, a direct control connection CONTROL between the play to air controller 120 and the play to air server 110 is used for passing control information.

The router 130 receives the output transport stream from the play to air server 110 via signal path S2 and responsively passes output transport stream to other studio components (e.g., editors, off-line storage elements and the like) via signal path S5, or to the network interface device 140 via signal path S6.

The network interface device (NID) 140 is used to communicate the output transport stream, control information or any other information between the television studio 100 of FIG. 1 and other studios (not shown). Optionally, the NID receives information streams from other studios, remote camera crews, broadcasters and the like. These streams are coupled to the play to air server 110 for immediate processing into an output transport stream being produced (e.g., "live" coverage of a news event), for delayed processing or for storage in the mass storage device (with or without processing).

The play to air server 110 and mass storage device 115 may be implemented using a compressed bitstream video server such as the Origin 2000 "Play-To-Air /Production Server" manufactured by SGI of Mountain View, California.

5       The play to air controller 120 comprises a play list 125 corresponding to the information streams or clips that are to be scheduled for subsequent incorporation into the output transport stream of the play to air server 110. The play list 125 includes exact frame entry and exit locations of each of the information streams or clips that are to be retrieved from the mass storage  
10   device 115 and concatenated or spliced into the output transport stream by the play to air server. The play list 125 may also identify the first and last frames for each of the information streams or clips.

      The play to air server 110, in response to a control signal from the play to air controller providing at least portions of the play list 125,  
15   retrieves the appropriate streams or clips from the mass storage device and splices the clips in a seamless, frame accurate manner according to the frame entry and exit information within the control signal to produce the output transport stream. Importantly, the output transport stream produced has no syntax errors or discontinuities to any other studio  
20   component, including any remote feeds provided by the Network Interface Devices 140. The splicing or concatenation operations performed by the play to air server will be explained in more detail below with respect to FIG. 2A and FIG. 2B.

      FIG. 2A and FIG. 2B are graphical representations of a splicing  
25   operation useful in understanding the invention. Specifically, FIG. 2A graphically depicts a frame accurate, seamless splicing operation of two 30 frames per second MPEG-2 transport stream clips (210, 220) using a transition clip (230) to produce a resulting spliced 30 frames per second MPEG-2 transport stream clip (240). The transition stream 230 is formed  
30   using portions of the first stream 210 and the second stream 220. The resulting spliced stream 240 comprises the concatenation of portions of the first 210, transition 230 and second 220 streams. The resulting spliced

stream 240 comprises a “knife edge” or frame accurate splice between the first and second streams at an out-point (210-OUT) of the first stream 210 and an in-point (220-IN) of the second stream 220.

FIG. 2B depicts various SMPTE timecodes associated with the streams or clips depicted in FIG. 2A. The first stream or clip 210 (STREAM A) comprises a plurality of frames including a first frame 210-ST beginning at a time  $t_0$ , illustratively at a respective SMPTE timecode of 00:00:00:00; a transition out frame 210-TRANS beginning at time  $t_1$ , an out-frame 210-OUT ending at a time  $t_2$ , illustratively at a respective SMPTE timecode of 00:00:02:13; and a last frame 210-END starting at a time greater than time  $t_2$ .

The out-frame 210-OUT comprises the last frame of the first stream 210 to be displayed (i.e., the frame immediately preceding the desired splice point). The out-frame 210-OUT will be included within the transition stream 230. The transition out frame 210-TRANS comprises the last frame of the first stream 210 to be transmitted. That is, the transition stream 230 will be concatenated to the first stream 210 immediately after the transition out frame 210-TRANS.

The second stream or clip 220 (STREAM B) comprises a plurality of frames including a first frame 220-ST beginning at a respective SMPTE timecode of 00:00:00:00; an in-frame 220-IN beginning at time  $t_2$ , illustratively at a respective SMPTE timecode of 00:00:00:23; a transition in frame 220-TRANS beginning at time  $t_3$  and a last frame 210-END ending at a time  $t_4$ , illustratively a respective SMPTE timecode of 00:00:04:17.

The in-frame 220-IN comprises the first frame of the second stream 220 to be displayed (i.e., the frame immediately following the desired splice point). The in-frame 220-IN will be included within the transition stream 230. The transition in frame 210-TRANS comprises the first frame of the second stream 220 to be transmitted. That is, the transition in frame 220-TRANS will be the first frame of the second stream 210 concatenated to the transition stream 230.

The transition stream or clip 230 (STREAM T) is a data structure well adapted to providing seamless, frame accurate splicing of video streams. The transition stream or clip 230 (STREAM T) comprises a plurality of frames including a first frame 230-ST beginning at a time  $t_1$ ; and  
 5 a last frame 230-END ending at time  $t_3$ . The transition clip is comprises frames from both the first stream 210 and the second stream 220, including the respective in- and out-frames. The beginning and end of the transition clip is depicted in FIG. 2 as, respectively, time  $t_1$  and  $t_3$ . It must be noted that these times and the actual first and last frames of the transition  
 10 stream will be determined according to methods that will be described below with respect to FIGS. 8 and 9.

The resulting spliced stream 240 comprises a plurality of frames including a first frame 240-ST beginning at time  $t_0$ , illustratively a respective SMPTE timecode of 00:00:00:00; and a last frame 240-END  
 15 ending at time  $t_4$ , illustratively a respective SMPTE timecode of 00:00:04:17. The spliced stream 240 comprises 73 frames from the first clip 210 (i.e.,  $t_0$  through  $t_2$ ) and 115 frames from the second clip 220 (i.e.,  $t_2$  through  $t_4$ ).

The splice stream 240 depicted in FIG. 2A comprises the first 210 and second 220 streams concatenated in a manner (using the transition stream  
 20 230) to effect a knife edge splice (splice stream 240 timecode 00:00:02:13) where the first stream 210 is apparently exited at the out frame 210-OUT and the second stream 220 is apparently entered at in frame 220-IN. Utilizing the present invention, this splicing operation occurs in a frame accurate manner, regardless of the frame type of the out (exit) and in (entry)  
 25 frames.

It should be noted that under ideal splicing conditions (discussed in the SMPTE 312M splicing standard) it is possible that no transition clip is required. However, under most conditions, the transition clip will contain multiple frames rather than the "empty frame" transition clip that may be  
 30 generated under the ideal conditions.

FIG. 3 depicts an embodiment of a play to air server suitable for use in the television studio of FIG. 1. Specifically, the exemplary play to air

server 110 of FIG. 3 comprises an input/output (I/O) circuit 310, support circuitry 330, a processor 320, a memory 340 and an optional time base corrector 350. The processor 320 cooperates with conventional support circuitry 310 such as power supplies, clock circuits, cache memory and the like as well as circuits that assist in executing the various software routines within the play to air server 110. The play to air server 110 also includes input/output circuitry 310 that forms an interface between the play to air server 110 and the mass storage device 115 and router 130.

The memory 340 includes programs and other information suitable for implementing the invention. Specifically, the memory 340 is used to store programs that, when executed by the processor 320, perform an index generation function 342, a transition clip generation function 344 and, optionally, a transition clip time restamping function 345. Optionally, the memory 340 includes one or both of an index library 346 and a stream library 348.

To provide a splicing operation such as described above with respect to FIGS. 2A and 2B, the invention utilizes the transition clip generation function 344. The transition clip generation function 344 generates a transition clip, such that it is possible to exit the first stream 210 at a first prescribed Transport Packet boundary (determined by, e.g., the transition stream generator), run the generated transition clip 230, and then enter the second stream 220 at a second prescribed Transport Packet boundary. The actual exit (210-TRANS) and entry (220-TRANS) points to the first 210 and second 220 stream will typically not correspond to the actual frames that were requested. Rather, the transition clip will be constructed using some number of frames immediately before the splice required exit point 210-OUT of the first stream 210, and some number of frames immediately after the splice required entry point 220-IN of the second stream 220.

The invention selects frames to be included in the transition stream in a manner that, preferably, optimizes the quality of the inter-stream transitions. That is, even though a splicing operation is performed in a frame accurate and seamless manner, it is possible for the splicing operation

to result in qualitative degradation of video information near the splicing points. This is caused by “bit starving” or other coding anomalies resulting from, e.g., mismatched video buffering verifier (VBV) levels. The invention adapts the VBV levels to minimize such anomalies.

5           The index generation function 342 will now be described in detail. Two types of information are used to build a transition clip, frame data and MPEG data. Frame data comprises information such as the location, coding type and presentation order of particular frames in the from- and to-streams. Frame data is used to determine which frames within the from-stream and the to-stream are to be recoded to produce the transition clip. MPEG data comprises information such as frame dimensions, bit rate, frame versus field formats, video buffering verifier (VBV) delay, chrominance sampling formats and the like. MPEG data is used to specify the MPEG encoding characteristics of the transport stream. The transition clip is preferably encoded or recoded using the same MPEG parameters as the input TS.

To assist in the generation of transition clip(s) by the transition clip generation function 344, the invention utilizes the index generation function 342. Specifically, the index generation function 342 is used to process each of the transport streams to be spliced to determine several parameters associated with each frame within the transport streams. The determined parameters are stored in a meta file, such that each transport stream processed by the index generation function 342 has associated with it a meta file. The transport streams processed by the index generation function 342 may be stored in the mass storage device 115 or in the stream library 348. Similarly, the meta file associated with a transport stream may be stored in the mass storage device 115 or in the index library 346.

In the exemplary embodiment, the index generation function 342 determines, for each respective video frame in a transport encoded video stream, the following:

- 1) the current picture number (in display order);
- 2) picture coding type (I-, P- or B-frame);

- 3) the number of the transport packet containing the start of the frame;
- 4) the number of the transport packet containing the end of the frame;
- 5) the presentation time stamp (PTS) of the frame;
- 6) the decode time stamp (DTS) of the frame;
- 5 7) the number of the transport packet containing the start of the sequence header preceding the frame;
- 8) the number of the transport packet containing the start of the picture header preceding the frame; and
- 9) any indicia of the frame comprising an appropriate in frame or out
- 10 frame, such as provided by frame markings according to the SMPTE 312M splicing syntax.

In addition to the per-frame data, the index generation function 342 optionally saves all fields for common MPEG-2 structures such as sequence headers, picture headers and the like.

- 15 Thus, the stream library 348 (or mass storage device 115) comprises transport streams that have been processed according to the index generation function 342. An embodiment of the index generation function 342 will be described below with respect to FIG. 10.

Since parsing a transport stream can be time consuming, one

20 embodiment of the invention utilizes pre-indexing. That is, transport streams stored within the mass storage device 115 or stream library 348 are processed by the index generation function 342 at the time of storage or as soon as possible thereafter. In this manner the time required to build transition clips is greatly reduced since there is no need to parse transport

25 streams at the time of splicing to determine frame and MPEG parameters of the streams. In addition, the play to air server 110 optionally utilizes the meta files stored within the mass storage device 115 or index library 346 to quickly retrieve characteristics of a transport stream that may be needed for scheduling and other functions, such as frame rate.

- 30 FIG. 10 depicts a flow diagram of a method for indexing an information stream. Specifically, FIG. 10 depicts a flow diagram of a method 1000 suitable for use in the index generation function 342 of the

play to air server 110 of FIG. 3. The method 1000 of FIG. 10 is suitable for use in implementing step 705 of the method 700 of FIG. 7.

The method 1000 is entered at step 1005, when an information stream to be indexed is received. The method 1000 then proceeds to step  
5 1010.

At step 1010 the transport layer of the information stream to be indexed is parsed. That is, the header portion of each transport packet within the information stream to be parsed is examined to identify a transport packet number (tr), the presence or absence of a sequence header  
10 within the transport packet, the presence or absence of a picture header within the transport packet, the presence or absence of a SMPTE 312M splicing syntax indication of a splicing in-frame or a splicing out-frame and other information. The method 1000 then proceeds to step 1015.

At step 1015 the first or present frame is examined. That is, the  
15 information stream to be indexed is parsed down to the packetized elementary stream (PES) layer to examine the first video frame of the video elementary stream included within the information stream to be indexed. The method 1000 then proceeds to step 1020.

At step 1020 various parameters associated with the frame examined  
20 in step 1015 are determined. Specifically, referring FIG. 1020-D, step 1020 determines the current picture number (in display order), the picture coding type (I-, P- or B- frame), the number of the transport packet containing the start of the frame, the number of the transport packet containing the end of the frame and the presentation times stamp (PTS) and decode time stamp  
25 (DTS) of the frame. As previously noted with respect to step 1010, the transport packet containing the start of the sequence header preceding the frame has been noted, the number of the transport packet containing the start of the picture header preceding the frame has been noted and any indicia of the frame comprising an appropriate in-frame or out-frame, such  
30 as provided by frame markings according to the SMPTE 312M splicing syntax have been noted. Additionally, at step 1020 the "CBd and Bd" are also determined. The method 1000 then proceeds to step 1025.



The quantity  $B_d$  is a buffer delay as marked in the stream. This is the amount of time the first bit of a picture remains in the VBV buffer. The quantity  $CB_d$  is the calculated buffer delay. The indexer calculates this value as indicated in Annex C of the MPEG-2 specification. The buffer  
 5 delay  $B_d$  and calculated buffer  $CB_d$  should match, but if the input stream is improperly marked the two quantities may differ. The buffer delay value is used by the invention to determine how to adjust the VBV levels between 210trans and 220trans. The VBV level adjustment is done in the transition clip.

10 At step 1025 the information regarding the index information is stored in, e.g., the mass storage device 115 or the index library 346. The method 1000 then proceeds to step 1030.

At step 1030 a query is made as to whether more frames are to be processed. If the query is answered negatively, then the method 1000  
 15 proceeds to step 1040 where it is exited. If the query is answered affirmatively, then the method 1000 proceeds to step 1035 where the next frame is queued, and to step 1015, where the next queued frame is examined.

FIG. 11 depicts a tabular representation of a meta file suitable for use  
 20 in the index library 346 of FIG. 3. Specifically, the table 1100 of FIG. 11 comprises a plurality of records (1-54), each record being associated with a respective starting transport packet field 1110, packetized elementary stream identification field 1120, frame and frame type identification field 1130, PTS field 1140, DTS field 1150,  $B_d$  field 1160,  $CB_d$  1170 and marked  
 25 splice point field 1180.

In one embodiment of the invention, the index generation function 342 is not used prior to receiving and/or splicing transport streams. In this embodiment, frame selection is accomplished using a single-pass processing of at least a portion of each transport stream to be spliced to determine  
 30 several parameters related to the from-stream and to-stream.

For both the from-stream and the to-stream, the following parameters are determined: transport packet offsets of the `sequence_header` and

picture\_header to begin decoding, the number of frames to decode; and the number of decoded frames to discard (e.g., anchor frame needed to decode frames to be included in the transition clip).

For the from-stream only, the following parameters are determined: the  
5 last transport packet to play from the from-stream (i.e., the new exit point or exit frame); and the PTS of first frame to display in the transition clip.

For the to-stream only, the following parameters are determined: the starting and ending transport packets for the I-frame to copy to the transition clip; the starting and ending transport packets for remaining  
10 GOP to copy to the transition clip; the first transport packet to play from the to-stream (i.e., the new entry point or entry frame); and the number of frames to be copied.

In addition, since the indexing library retrieves MPEG fields as it parses a transport stream, all required recoding parameters are also saved  
15 during frame selection.

The transition clip generation function 344 will now be described in detail. The process of constructing a transition clip comprises the steps of 1) determining which frames to include in the transition clip; 2) decoding the frame to be included in the transition clip; 3) encoding or recoding the  
20 frames forming the transition clip and 4) transport encoding (i.e., packetizing) the transition clip.

Frame selection affects the size of the output transition clip, the amount of time required to generate the transition and places constraints on the encoder in terms of optimizing the quality of the recoded video. The  
25 frame selection method discussed herein resolves the issues of frame dependencies while reducing the frame count and still allowing enough transition time to recode the video without significant loss of quality.

The encoding or recoding step is typically the most time consuming step in the transition clip generation function 344, so reducing the number  
30 of frames to recode provides time savings. However, since one of the primary reasons for building a transition clip is to reconcile differences in VBV levels between the two transport streams being spliced. Reducing the

frame count makes it more difficult for the encoder to maintain video quality while adjusting the VBV level (especially when decreasing it, since frames must be encoded with fewer bits). To decrease the VBV level, fewer bits must be placed into the buffer than are taken out. This requires the  
 5 encoder to use fewer bits per picture (on average).

FIG. 5 depicts a tabular representation of image frame display order and image frame transmission order useful in understanding the invention. Specifically, FIG. 5 depicts a first tabular representation 510 depicting the display order of, illustratively, 24 encoded image frames forming a portion of  
 10 a video sequence and a second tabular representation 520 depicting the transmission order of the 24 image frames forming the video sequence. For purposes of this discussion, the video sequence depicted in FIG. 5 comprises a portion of a from-stream video sequence (i.e., the first displayed sequence in a spliced sequence), such as described above with respect to the first  
 15 stream 210 of FIG. 2.

Specifically, per the first tabular representation 510, the image frames are displayed and encoded according to a group of pictures (GOP) structure as follows (from frame 1 to frame 24):

I-B-B-P-B-B-P-B-B-I-B-B-P-B-B-P-B-B-I-B-B-P-B-B.

20 Additionally, per the second tabular representation 520, the image frames are transmitted in the following frame order:

1-4-2-3-7-5-6-10-8-9-13-11-12-16-14-15-19-17-18-22-20-21-25-23.

It is assumed, for purposes of the following discussion, that it is desired to exit the video sequence depicted in FIG. 5 at frame 15, which  
 25 comprises a B-frame. That is, frame 15 comprises the out-frame of the exit stream depicted in FIG. 5. As will be discussed below, frames 10 through 15 will be decoded (in display order). It should be noted that frame 16 is the previous anchor frame to frame 15 in transmission order. Therefore, it is necessary to decode frame 16 prior to decoding frames 14 and 15 (which are  
 30 B-frames). The last frame in the from-clip prior to the transition clip will be frame 13. That is, the from-clip will be exited immediately before frame 16.

FIG. 6 depicts a tabular representation of image frame display order and image frame transmission order useful in understanding the invention. Specifically, FIG. 6 depicts a first tabular representation 610 depicting the display order of, illustratively, 26 encoded image frames forming a portion of a video sequence and a second tabular representation 620 depicting the transmission order of the 26 image frames forming the video sequence. For purposes of this discussion, the video sequence depicted in FIG. 6 comprises a portion of a to-stream video sequence (i.e., the second displayed sequence in a spliced sequence), such as described above with respect to the second stream 220 of FIG. 2.

Specifically, per the first tabular representation 610, the image frames are displayed and encoded according to a group of pictures (GOP) structure as follows (from frame 1 to frame 26):

I-B-B-P-B-B-P-B-B-I-B-B-P-B-B-P-B-B-I-B-B-P-B-B-I-B.

Additionally, per the second tabular representation 620, the image frames are transmitted in the following frame order:

1-4-2-3-7-5-6-10-8-9-13-11-12-16-14-15-19-17-18-22-20-21-25-23-24-28.

It is assumed, for purposes of the following discussion, that it is desired to enter the video sequence depicted in FIG. 6 at frame 15, which comprises a B-frame. That is, frame 15 comprises the in-frame of the entry stream depicted in FIG. 6. As will be discussed below, frames 10 through 18 will be decoded (in display order). It should be noted that the first frame to be displayed from the to-stream is frame 25 (an I-frame that is not included in the transition clip).

FIG. 7 depicts a flow diagram of a method for generating a transition stream or transition clip. Specifically, FIG. 7 depicts a flow diagram of a method 700 suitable for use in the transition clip generation function 344 of the play to air server 110 of FIG. 3.

The method 700 is entered at step 705, where a “from-stream” and “to-stream” are annotated. That is, the information stream providing the information prior to a splice point (the from-stream) and the information stream providing information subsequent to the splice point (the to-stream)

are annotated to identify, on a frame-by-frame basis various frame parameters as described above with respect to the index generation function 342. A method for annotating an information stream is described above with respect to FIG. 10. The method 700 then proceeds to step 710.

5       At step 710 a portion of the from-stream prior to the exit frame is decoded. That is, a plurality of information frames within the from-stream, including the exit frame (i.e., the last information frame within the from-stream to be displayed) are decoded. The method 700 then proceeds to step 715.

10       At step 715 a portion of the to-stream starting at the entry frame is decoded. That is, information frames within the to-stream beginning with the entry frame (i.e., the first frame of the to-stream to be displayed) are decoded. The method 700 then proceeds to 750.

At step 720 the decoded portions of the from-stream and to-stream  
15   are re-encoded to produce a transition clip or transition stream. A transport stream including, e.g., video and audio information associated with the from-stream and to-stream.

The transition stream or transition clip generated by the method 700  
of FIG. 7 is used as a transition between the from-stream and the to-stream  
20   by, e.g., the play to air server 110 of FIGS. 1 and 3.

25

#### A.     Frame Selection.

The first step in the process of constructing a transition clip or transition stream comprises the step of determining which frames to include  
30   in the transition clip (i.e., the frame selection process).

FIG. 8 depicts a flow diagram of a method of determining which information frames within a from-stream should be included within the

transition stream. The method 800 of FIG. 8 is suitable for use in implementing step 710 of the method 700 of FIG. 7.

The method 800 is entered at step 805, where the exit frame of the from-stream is identified. The exit frame of the from-stream is the last frame within the from-stream to be displayed prior to a splice point. For example, referring now to the from-stream depicted in FIG. 5, the exit frame (frame 15) comprises a B-frame denoted as frame 513. The method 800 then proceeds to step 810.

At step 810 the method 800 decodes, in display order, the exit frame and the immediately preceding non-anchor frames. That is, referring again to FIG. 5, the exit frame (frame 15) and the immediately preceding non-anchor frames (frames 11, 12, 13 and 14) are decoded. Since frames 11, 12 and 13 are predicted using frame 10, it is necessary to also decode frame 10. However, the decoded frame 10 may be discarded after frames 11-13 have been decoded. That is, all frames from the I-frame preceding the exit frame in display order up to and including the exit frame are decoded. It is necessary to start from the I-frame because the I-frame has no frame dependencies (i.e., it can be decoded without first decoding any other frames). The method 800 then proceeds to step 815.

At step 815 a query is made as to whether the exit frame is a B-frame. If the query at step 815 is answered negatively, then the method proceeds to step 820. If the query at step 815 is answered affirmatively, then the method 800 proceeds to step 825.

At step 820, since the exit frame is either an I-frame a P-frame, the last from-stream frame to be displayed (i.e., the transition frame) prior to the transition stream frames is the frame immediately preceding, in transmission order, the exit frame. That is, if frame 15 of the from-stream depicted in FIG. 5 was a P-frame or I-frame rather than B-frame, then the last from-stream frame to be displayed would be frame 14. If the exit frame is an I- or P-frame, frame dependencies and reordering make it possible to leave the transport immediately before the next anchor frame (i.e., after all B-frames that are dependent on the exit frame). While this reduces the

number of frames to recode, it also reduces the opportunity to adjust VBV levels for the transition. The method 800 then proceeds to step 830.

At step 825 if the exit frame is a B-frame (such as the exit frame in the from-stream depicted in FIG. 5), then the last from-stream frame to be  
5 displayed is the frame immediately preceding, in transmission order, the preceding anchor frame. Referring now to FIG. 5, the preceding anchor frame with respect to the exit frame is a P-frame (frame 13). It should be noted that the last frame to be transmitted of the 24 frame sequence depicted in FIG. 5 is the B-frame 12, while the last frame to be displayed is  
10 the P-frame 13. The method 800 then proceeds to step 830.

At step 830 the decoded frames following, in display order, the last from-stream frame (e.g., the B-frame denoted as frame 12 in FIG. 5) are stored in the transition clip. It should be noted that the transition stream or clip will also include frames from the to-stream. All of the frames that  
15 are stored within the transition clip will then be re-encoded to form an encoded transition clip or transition stream.

FIG. 9 depicts a flow diagram of a method for determining which information frames within a to-stream should be included within the transition stream. Specifically, the method 900 of FIG. 9 is suitable for use  
20 in implementing step 715 of the transition stream generation method 700 of FIG. 7.

The method 900 is entered at step 905, where the entry frame of the to-stream is identified. The entry frame of the to-stream is the first frame within the to-stream to be displayed after a splice point. For example,  
25 referring now to the to-stream depicted in FIG. 6, the entry frame (frame 15) comprises a B-frame. The method 900 then proceeds to step 910.

At step 910 the entry frame and all frames appearing before the next I-frame, in display order, are decoded. That is, referring to FIG. 6, the entry frame (frame 15) and all frames (i.e., frames 16, 17 and 18) appearing before  
30 the next I-frame (frame 19) are decoded. Since frames 17 and 18 in the to-stream video sequence depicted in FIG. 6 are predicted using information from the next I-frame (frame 19), it is necessary to also decode the next

I-frame. However, the decoded frame 19 may be discarded after frames 17 and 18 have been decoded. The method 900 then proceeds to step 915.

At step 915 the next I-frame (e.g., frame 19 of video sequence 610) is copied to the transition clip. That is, the video information within the 5 transport packets forming the to-stream (i.e., the video elementary stream information) are extracted from the transport packets and copied to the transition clip. It is noted that the output of the encoder is a video elementary stream (VES) such that the output from the encoder may be copied directly to the transition clip. The transition clip will be 10 subsequently packetized. The method 900 then proceeds to step 920.

At step 920 the frames (e.g., frames 20 through 22) between the next I-frame (e.g., frame 25) and the following I-frame (frame 19) are also copied, in transmission order, to the transition clip. It must be noted that the frames copied to the transition clip in steps 915 and 920 (e.g., frames 19-21) 15 are copied to the transition clip as encoded frames. Thus, the method 900 adds to the transition clip decoder frames comprising the entry frame and all frames appearing before the next I-frame, and encoded frames comprising the next I-frame and all frames between the next I-frame and the following I-frame.

20 The from-stream and to-stream frame selection methods described above with respect to FIGS. 8 and 9 allow for frame dependencies between the transition stream frames and those in one or both of the from-stream and to-stream. The following constraints should be observed. The transition clip is encoded as a closed GOP structure. That is, the transition 25 clip is a self-contained video clip. The transport stream being exited will not reference any frames in the transition clip. If the transport stream being entered is coded using an open GOP structure, then it may contain frames that reference frames in the transition clip.

An important aspect of the invention is the processing of the 30 transition clip to appropriately address frame dependencies of frames that are included within the transition clip. A frame dependency comprises, e.g., a predicted frame within the transition clip (i.e., a P-frame or B-frame) that



must be decoded using an anchor frame from outside of the transition clip. While it is desirable to create a transition clip in which there are no external frame dependencies (i.e., a “self contained” clip), the invention is capable of producing an MPEG compliant transition clip including such  
5 frame dependencies.

## B. Decoding.

The second step in the process of constructing a transition clip or  
10 transition stream comprises the step of decoding the frames selected in the frame selection process. The decoding of the selected frames may be effected using standard hardware or software decoding techniques.

It should be noted that, regardless of which frames are to be decoded, decoding must begin at an I-frame. As an artifact of the use of prediction in  
15 MPEG encoding, every non-I-frame is ultimately dependent on the previous I-frame. The above-described frame selection methods break these dependencies in order to enable frame accurate, seamless splicing between transport streams.

## 20 C. Encoding.

The third step in the process of constructing a transition clip or transition stream comprises the step of encoding the decoded frames resulting from the frame selection and decoding processes. The encoding of  
25 the selected frames may be effected using standard hardware or software decoding techniques.

In addition to breaking frame dependencies (as noted above), one of the primary objectives when generating a transition clip is to adjust the VBV levels between the from-stream and to-stream such that a far-end  
30 decoder processing the resulting spliced transport stream will not suffer overflow, underflow or other undesirable decoder buffer memory behavior. For example, if the VBV level at the exit point of the from-stream is lower

than the VBV level at the entry point of the to-stream, then underflow may result downstream from the splice. In typical decoders this will result in “freeze frames” while the decoder waits for data to become available. A much more serious problem occurs when the VBV level at the exit point of the from-stream is higher than the VBV level of the entry point of the to-stream. This may result in a VBV overflow downstream from the splice. An overflow occurs when more data is available than can be buffered. Overflows result in lost and/or corrupted data and typically cause visual artifacts in the decoded pictures and can even cause a decoder to reset.

After the selected frames have been decoded to baseband, they are recoded into a VES. The inventors used a Sarnoff Corporation DTV/MPEG-2 Software Encoder to ensure high overall performance, picture quality and modularity. The rate control algorithm in the encoder was modified to allow specification of initial and ending VBV levels, while the input module of the encoder was updated to support the output file format of the decoder. The MPEG encoding parameters that were parsed from the transport stream during frame selection are passed to the encoder to ensure that the recoded video is compatible with the clips being spliced.

With respect to rate control (which ultimately determines overall picture quality of the recoded portion of the transition clip), when adjusting the VBV level upwards, the selected frames are coded using fewer bits than the original streams. While increasing the VBV level may result in some loss of quality in the resulting output, due to masking in the human visual system, a small degradation in video quality at a scene change is often imperceptible to a viewer. The inventors have determined that such visual degradation imparted to a stream including a frame accurate, seamless splice does not result in a perceptible level of video degradation.

In one embodiment of the invention, the from-stream and to-stream each comprise transport streams having respective video buffering verifier (VBV). The invention determines if a difference exists between the from-stream VBV and the to-stream VBV and responsively adapts the re-encoding process to such a difference, as necessary. For example, the

invention may adapt the re-encoding process by increasing a rate control bit allocation in response to a determination that the from-stream VBV exceeds the to-stream VBV by a first threshold level, and by decreasing the rate control bit allocation in response to a determination that the to-stream VBV exceeds the from-stream VBV by a second threshold level.

#### D. Packetizing.

10

The fourth step in the process of constructing a transition clip or transition stream comprises the step of encoding the decoded frames resulting from the frame selection and decoding processes

After recoding the selected frames, the I-frame and remaining GOP that were copied from the to-stream are appended to the recoded VES. Pending restamping of temporal\_reference fields, the resulting transition clip comprises a syntactically complete MPEG-2 stream (except that it does not have a sequence\_end\_code) and contains all frames in the transition. The final step is to packetize the VES into a transport stream.

20 The first step in packetizing the transition stream is to parse the transition stream to locate the offsets of the start of each frame (either a sequence\_header or a picture\_header) and the types of frames within the transition stream. Once this data is available, the dependencies between frames are calculated and the frame display order is determined. It should be noted that the temporal\_reference fields are unsuitable for this purpose since they are presently invalid due to GOP restructuring. Once the display order has been determined, the temporal\_reference fields are re-stamped and the presentation (PTS) and decode (DTS) time stamps are calculated for each frame in the transition stream.

30 It should be noted that according to the MPEG-2 standard, temporal discontinuities within a transport stream are allowed. However, since some decoders are not entirely compliant with the MPEG-2 standard, such

allowed temporal discontinuities within a transport stream result in improper decoder operation. Thus, it is desirable to remove such temporal discontinuities within a transport stream by the use of the re-stamping process.

- 5           Using the output of the restamping process, PES headers are generated and the frames are output into a PES stream. The location of each PES header and the size of each PES packet are recorded during this process. Finally, transport packets are generated to hold the PES packets. Each layer of packets adds overhead to the TS resulting in a slight size  
10   increase. The packets in the resulting TS are stamped with the PID of the video stream being spliced. The final output of the packetizing process is a TS containing a single VES. The stream does not contain any program specific information (PSI).

15   E.     Remultiplexing.

- The final step in the process of constructing a transition clip or transition stream comprises the step of remultiplexing the video clip (now a transport stream) with program specific information (PSI) from the original  
20   program stream.

- To accomplish the remultiplexing step, the from-stream is examined to extract (as transport packets) a single instance of the program association table (PAT) and the program map table (PMT). In the case of splicing single program transport streams there will only be one PMT. In the case of  
25   splicing multiple program transport streams there will only be multiple PMTs. Optionally, to fully implement the ATSC broadcast format, it is necessary to extract other tables as well (as known to those skilled in the art).

- After extracting the PAT and the PMT(s), the number of packets in  
30   the transition clip is calculated based on the multiplex bit rate, the number of frames in the transition clip and the frame rate. For example, the ATSC specification requires a PAT at least every 100ms and a PMT at least every

400ms. The number of packets between PAT and PMT tables is determined from the multiplex bit rate.

After calculating the number of packets in the transition clip, a blank transition clip composed of null transport packets is created and the PAT  
5 and PMT tables are inserted at the calculated spacings (e.g., PAT every 100mS and PMT every 400mS).

After appropriately inserting the PAT and PMT(s) in the blank transition stream, the video transport stream is inserted into the blank transition stream by spacing packets within the remaining available  
10 packets, thereby forming an output transport stream.

It should be noted that when inserting the PAT, PMT and video packets into the empty transition clip, each packet should be restamped with a new continuity\_counter. The starting value of the continuity\_counter is determined separately for each PID from the exit-stream or from-stream.  
15 If the video clip is too large, then there won't be enough transport packets in the transition clip, since the size of the transition clip is calculated with respect to the expected clip duration. This calculation takes into account the frame count, frame rate, VBV delays, multiplex bit rate etc. It is important that VBV adjustment is performed properly by the encoder.

20 The completed transition clip is then inserted between the spliced transport streams at the calculated transport packet offsets, thereby executing a seamless splice.

The above-described invention advantageously provides for seamless, frame accurate splicing or concatenation of transport streams using  
25 transition streams of clips, thereby avoiding the construction of an entirely new transport stream. The from-and to-streams are not modified during the process, since they are only used to provide information sufficient to produce the transition stream. The transition stream, after being used to effect a change between streams, may be discarded by the system or saved for  
30 future use.

In applications that require the storage of transition clips for every possible splicing combination, the above-described invention requires the

generation of a very large number of transition clips. For example, if a server utilizes  $N$  streams,  $2*N*(N-1)$  transition clips must be generated. Additionally, it is sometimes impracticable to generate a transition clip due to time and/or processing resource constraints. For example, if the

5 generation of a transition clip requires 8-10 seconds, and a splice into a live, non-delayed video feed is required, then a transition clip may not provide optimal results.

Therefore, in one embodiment of the invention a single transition clip is not used to effect a splice. Rather, an out-point adapter is used to

10 transition out of the exit stream, while an in-point adapter is used to transition into the entry stream. Specifically, this embodiment of the invention utilizes universal "bitstream splicing adapters." In this embodiment of the invention an "out-point splicing adapter" comprises, for example, an initial portion of the above-described transition clip except that

15 out-point splicing adapter ends in a particular condition. Similarly, an "in-point adapter" comprises, for example, a remaining portion of the above-described transition clip except that the in-point splicing adapter begins with a corresponding particular condition. It is important to note that the corresponding terminating out-point adapter conditions and initial in-point

20 and conditions are not dependant upon the stream for which the adapter was initially created. Thus, the terminating condition of the out-point adapter and the initial condition of the in-point adapter are compatible such that any in-point adapter may be concatenated to any corresponding out-point adapter to effect a splice.

25 The splice point adapters are created for one given stream, not two, so that far fewer adapters are required. Thus the number of adapters which must be created to splice between any of  $N$  streams is simply  $2*N$ , which increases only linearly with the number of streams. In addition, the use of splice point adapters allows splicing to remote streams which include such

30 adapters, without knowledge of the condition of the remote stream at the desired splice point. That is, streams received from remote servers that make use of standardized splicing adapters may be spliced by a local server

utilizing the standardized splicing adapters, thereby avoiding the need to determine the state of the remote stream in order to splice to it.

While the particular standard condition of the splicing adapters is not of particular importance, it is important is that the same condition be  
5 utilized for all streams to be spliced in this manner. In the exemplary embodiment, the in-point and out-point conditions utilized are those provided in the SMPTE proposed standard 312M, entitled "Splice Points for MPEG-2 Transport Streams."

In one embodiment of the invention, the splicing adapters are created  
10 in addition to the original streams, thereby leaving the original streams untouched. Alternatively, the splicing adapters are created and used to replace corresponding portions of the original streams such that splicing operations may be facilitated in, for example, a real-time television network environment. In either case, to effect a splice, an out point is created by  
15 playing a given original stream up to the point where the out point adapter was created to take over. The out point adapter is then played in its entirety. Immediately following the end of the out point adapter, the in point adapter corresponding to the desired new stream is played in its entirety, whereupon the desired new stream begins to play at a point  
20 corresponding to the end of the in point adapter. In another embodiment, only the beginning and end of the original streams are replaced with in and out point adapters, so that these modified streams may be spliced one to another directly.

FIG. 4 is a graphical representation of a splicing operating useful in  
25 understanding an embodiment of the invention. Specifically, FIG. 4 graphically depicts a frame accurate, seamless splicing operation of two MPEG-2 transport stream clips (410, 420) using an out-point adapter (415) and an in-point adapter (425) to produce a resulting spliced stream 430.

Each of the transport stream clips A 410 and B 430 include a shaded  
30 region representing respective portions of the streams that are correspond to information utilized in forming the splice adapters. The shaded region of stream A 410 begins with a point 410-TRAN and ends with a point 410-

OUT. This region is used to provide the out-point adapter 415, which is terminated with a standard out-point condition 415-OUT-COND. The shaded region of stream B 420 is processed to form the in-point adapter 425.

The resulting spliced stream includes a portion of stream A 430-A  
 5 prior to the frames utilized in providing the out-point adapter 415, followed by an out-point adapter portion 430-OUT, an in-point adapter portion 430-IN and the portion of stream B following the frames utilized in forming the in-point adapter 425.

FIG. 12 depicts a flow diagram of a method for generating in-point  
 10 adapters and out-point adapters. Specifically, FIG. 12 depicts a flow diagram of a method 1200 suitable for use in the in-point/out-point adapter generation function 349 of the play to air server 110 of FIG. 3.

The method 1200 is entered at step 1205 where a stream to be processed is provided, such as stream A 410 or stream B 420 of FIG. 4.  
 15 Specifically, at step 1205 the stream to be processed is parsed until an appropriate in-point or out-point is found. For the purposes of this example, it is assumed that a single stream will be processed to provide a plurality of in-point adapters and out-point adapters. It will be recognized that a stream designated as an out-stream may be processed solely to provide out-  
 20 point adapters, while a stream designated as an in-stream may be processed solely to provide in-point adapters.

At step 1210 a query is made as to whether an in-point or an out-point has been found. If an out-point has been found, then steps 1215 to 1235 are utilized to produce an out-point adapter. If an in-point has been  
 25 found, then steps 1240 to 1260 are utilized to produce an out-point adapter.

At step 1215 a portion of the stream ending with the out-point or exit frame is decoded. That is, one or more frames including the exit frame or information frame including the out-point within the stream being processed is decoded to provide, for example, a plurality of decoded picture  
 30 frames or video frames. These frames may be selected in the manner described above with respect to FIG. 8.



At step 1220 the decoded portion of the stream is re-encoded according to re-encode criteria including pre-defined out-point conditions. The re-encode criteria is defined in box 1212. Specifically, per box 1212, the re-encode criteria includes a standard out-point terminating condition  
5 according to the SMPTE 312M splice point standard, a proprietary technique or some other standard or technique. The SMPTE 312M parameters, which will be described in more detail below, include the utilization of various flags, buffer levels and other parameters to ensure a seamless or near-seamless splice operation.

10 At step 1225 the out-point adapter produced at step 1220 is associated with the found out-point. That is, the out-point adapter is associated with the found out-point such that a subsequent splicing operating may utilize the out-point adapter rather than the initial (i.e., unprocessed) portion of the stream being processed, as represented by the  
15 shaded region of stream A 410 of FIG. 4.

At step 1230 the out-point adapter is stored in, e.g., mass storage device 115. The method 1200 then proceeds to step 1205 where the next in-point or out-point is found.

Optionally, at step 1235 the out-point adapter produced at step 1220  
20 is used to replace the portion of the stream decoded at step 1215. That is, rather than simply producing an out-point adapter and associated that out-point adapter with a portion of the stream being processed, the optional embodiment of the invention replaces the entire decoded portion associated with that out-point with the out-point adapter produced at step 1220. In this  
25 manner, all of the VBV adaptations, frame type adaptations and other adaptations made to the out-point adapter may be incorporated "in line" with the stream being processed such that there is no need for subsequent retrieval of appropriate out-point adapters from memory. The method 1200 then proceeds to step 1205.

30 At step 1240 the portion of the stream being processed beginning with the in-point or entry frame associated with the found in-point is decoded. That is, at step 1240 the information frame associated with the found in-

point and one or more succeeding frames are decoded to produce, for example, a plurality of picture frames or video frames. These frames may be selected in the manner described above with respect to FIG. 9.

At step 1245, the portion of the stream decoded at step 1240 is re-  
5 encoded according to re-encode criteria including predefined in-point conditions. As noted with respect to box 1212, the predefined in-point conditions may be in accordance with those defined by SMPTE 312M with proprietary conditions or with other conditions. It is only necessary that the in-point condition, like the out-point condition, be pre-defined or otherwise  
10 common throughout a system utilizing the in-point or out-point adapters of the invention.

At step 1250 the in-point adapter produced at step 1245 is associated with the in-point found at step 1205. That is, the in-point adapter is associated with the found in-point such that a subsequent splicing operating  
15 may utilize the in-point adapter rather than the initial (i.e., unprocessed) portion of the stream being processed, as represented by the shaded region of stream B 420 of FIG. 4.

At step 1255 the in-point adapter produced at step 1245 is stored in, for example, mass storage device 115. The method then proceeds to step  
20 1205 where the next in-point or out-point is found within the stream being processed.

Optionally, the method 1200 proceeds to step 1260 where the portion of the stream decoded at step 1240 is replaced by the in-point adapter produced at step 1245. In this manner, all of the VBV adaptations, frame  
25 type adaptations and other adaptations made to the in-point adapter may be incorporated "in line" with the stream being processed such that there is no need for subsequent retrieval of appropriate in-point adapters from memory. The method 1200 then proceeds to step 1205.

The above-described invention provides for the construction of in-  
30 point adapters and out-point adapters that are, respectfully, initiated and terminated according to a common and compatible condition. The exemplary embodiment of the invention utilizes an initial in-point adapter

condition, and a corresponding termination out-point condition in accordance with the in-point and out-point constraints described within the SMPTE 312M MPEG-2 splice point standard, which is incorporated herein by reference in its entirety. The in-point constraints and out-point

- 5 constraints will now be briefly described within the context of an MPEG-2 transport stream. It will be appreciated by those skilled in the art that the invention may be practiced using other in-point and out-point conditions and using other types of information streams. It is only important for the in-point and out-point conditions to be compatible as defined within the
- 10 context of the invention.

- Out-point constraints define the nature of out-points. In-point constraints define the nature of in-points. Out-point constraints are divided into subcategories: out-point constraints that apply to all spliceable PID streams, additional constraints for video PID streams, additional
- 15 constraints for audio PID streams and constraints which define Program out-points. In-point constraints are divided into subcategories: in-point constraints that apply to all spliceable PID streams, additional constraints for video PID streams, additional constraints for audio PID streams and constraints which define Program in-points. Note that both video and audio
- 20 PID streams must adhere to the Splice Point constraints for spliceable PID streams.

- For all spliceable PID streams, constraints for use in terminating an out-point adapter are defined as follows: The `splicing_point_flag` shall be set to '1' in the out-point Packet. The `splice_countdown` shall be set to '0'
- 25 (0x00) in the out-point Packet. The last byte of the out-point Packet payload shall be the last byte of a PES packet. If the PID of the information stream equals the `PCR_PID`, then the out-point Packet shall have `PCR_flag` set to '1' and carry a PCR value. The `seamless_splice_flag` shall be set to '1' in the out-point Packet. The `DTS_next_AU` shall be set in the out-point Packet,
- 30 according to the definition in ISO/IEC 13818-1. The out-point Packet shall carry the `splice_type` field.

For spliceable video PID streams, additional constraints for use in terminating an out-point adapter are defined. For example, the last picture (in presentation order) preceding an out-point shall be either a P or an I picture. To enable seamless splicing, the last payload byte of the out-point

- 5 Packet shall remain in the VBV buffer an amount of time equal to:

$\text{splice\_decoding\_delay} - \text{Display\_Period\_last\_AUold}$ , where

$\text{Display\_Period\_last\_AUold}$  is the display duration of the video access unit of the old material which begins presentation at the time when the last video access unit is removed from the buffer. To enable seamless splicing,

- 10 the last picture (in presentation order) before an Out-point shall be either a frame picture or a bottom field picture.

For all spliceable PID streams, constraints for use in initiating an in-point adapter are defined as follows: The `splice_point_flag` shall be set to '1' in the in-point Packet. The `splice_countdown` field shall be set to '-1' (0xFF)

- 15 in the in-point Packet. If the PID equals PCR\_PID, the in-point Packet shall have the `PCR_flag` set to '1' and shall carry a PCR value. That is, the in-point Packet of the PCR\_PID must carry both a PCR and PTS/DTS value. Therefore, every in-point Packet of the PCR\_PID must have the `adaptation_field_control` parameter (in the Transport Stream packet
- 20 header) set to "11". This indicates that the in-point Packet of the PCR\_PID has both an adaptation field (for carrying the PCR) and a payload (for carrying the PTS/DTS fields). The `payload_unit_start_indicator` shall be set to '1' in the in-point Packet. The `data_alignment_indicator` of the PES packet shall be set to '1'. The `random_access_indicator` shall be set to '1' in
- 25 the in-point Packet. The first payload byte of the in-point Packet shall be the first byte of a PES header, which shall carry a PTS. It shall carry DTS if DTS does not equal PTS. The `seamless_splice_flag` shall be set to '1' in the in-point Packet. `DTS_next_AU` shall be set in the in-point Packet to the same value as the DTS value carried in the PES header in the in-point
- 30 Packet. If DTS is not present in the PES header, then `DTS_next_AU` shall be set to the value of PTS. The in-point Packet shall carry the `splice_type` field. The `splice_type` value for video.

For spliceable video PID streams, additional constraints for use in initiating an in-point adapter are defined. For example, the first PES packet payload following an in-point shall begin with a sequence\_header. The first coded picture after the sequence\_header shall be an I picture. Any

- 5 B pictures following an in-point shall not use prediction which references pictures prior to the in-point. To enable seamless splicing, the picture\_structure of the first picture (in presentation order) after an in-point shall be either Frame picture ('11') or Top Field ('01').

- The invention has been primarily described within the context of
- 10 splicing or concatenating two single program transport streams, i.e., transport streams containing a single audio-visual program, such as a movie, television show or commercial. However, those skilled in the art will appreciate that the invention provides frame accurate, seamless splicing between multi-program transport streams as well. To effect such a splice,
- 15 the above-described methods are adapted to determine out-frames, in-frames and other appropriate parameters for each program within the multi-program transport streams.

- Although various embodiments which incorporate the teachings of the present invention have been shown and described in detail herein, those
- 20 skilled in the art can readily devise many other varied embodiments that still incorporate these teachings.

What is claimed is:

1. A method for generating a splice point adapter, comprising the steps of:
  - 5 identifying at least one out-frame within a transport stream, said out-frame representing a last frame of said transport stream to be included in a spliced transport stream;  
decoding, for each identified out-frame, a respective portion of said transport stream including said out-frame; and
  - 10 re-encoding each decoded portion of said transport stream to produce a respective out-point adapter, each of said out-point adapters including a predefined terminating out-point condition.
2. The method of claim 1, further comprising the steps of:
  - 15 identifying at least one in-frame within said transport stream, said in-frame representing a first frame of said transport stream to be included in a spliced transport stream;  
decoding, for each identified in-frame, a respective portion of said transport stream including said in-frame; and
  - 20 re-encoding each decoded portion of said transport stream to produce a respective in-point adapter, each of said in-point adapters including an predefined initial in-point condition.
3. The method of claim 1, further comprising the step of:
  - 25 associating each out-point with a respective out-point adapter, wherein, in the case of a concatenating an additional transport stream to said transport stream at a particular out-point, said decoded portion of said transport stream proximate said particular out-point is replaced by said out-point adapter associated with said particular out-point.
  - 30
4. The method of claim 2, further comprising the step of:

associating each in-point with a respective in-point adapter, wherein,  
in the case of a concatenating said transport stream to an additional  
transport stream at a particular in-point, said decoded portion of said  
transport stream proximate said particular in-point is replaced by said in-  
5 point adapter associated with said particular in-point.

5. The method of claim 1, wherein said decoded portion of said transport  
stream including said out-frame comprises said out-frame and all preceding  
frames, in display order, from said out-frame to a prior I-frame;  
10 in the case of said out-frame comprising a B-frame, defining the  
frame immediately preceding said prior I-frame in transmission order as a  
final first transport stream frame in said transition stream; and  
in the case of said out-frame not comprising a B-frame, defining said  
out-frame as said final first transport stream frame in said transition  
15 stream.

6. The method of claim 1, wherein said portion of transport stream  
including said in-frame to be decoded is determined according to the steps  
of:  
20 decoding, in display order, said in-frame and all non-I-frames  
following said in-frame up to a next I-frame.

7. The method of claim 2, further comprising the step of indexing each of  
said transport stream, said step of indexing comprising the steps of:  
25 parsing a transport layer of said transport stream to identify packets  
associated with at least one of sequence headers, picture headers and  
predefined splicing syntax; and  
determining, for each frame in said transport stream, at least one of a  
picture number, a picture coding type, a start of frame transport packet  
30 number, an end of frame transport packet number, a presentation time  
stamp (PTS) and a decode time stamp (DTS).

8. The method of claim 7, wherein said determinations for each frame are stored in a meta file for subsequent use in generating a transition stream.

- 5 9. A method for generating a splice point adapter, comprising the steps of:

identifying at least one in-frame within a transport stream, said in-frame representing a first frame of said transport stream to be included in a spliced transport stream;

- 10 decoding, for each identified in-frame, a respective portion of said transport stream including said in-frame; and

re-encoding each decoded portion of said transport stream to produce a respective in-point adapter, each of said in-point adapters including an predefined initial in-point condition.

15

10. The method of claim 9, further comprising the steps of:

identifying at least one out-frame within said transport stream, said out-frame representing a last frame of said transport stream to be included in a spliced transport stream;

- 20 decoding, for each identified out-frame, a respective portion of said transport stream including said out-frame; and

re-encoding each decoded portion of said transport stream to produce a respective out-point adapter, each of said out-point adapters including a predefined terminating out-point condition.

25

11. The method of claim 10, further comprising the step of:

associating each out-point with a respective out-point adapter, wherein, in the case of a concatenating an additional transport stream to said transport stream at a particular out-point, said decoded portion of said transport stream proximate said particular out-point is replaced by said out-point adapter associated with said particular out-point.

30



12. The method of claim 9, further comprising the step of:

associating each in-point with a respective in-point adapter, wherein,  
in the case of a concatenating said transport stream to an additional  
transport stream at a particular in-point, said decoded portion of said  
5 transport stream proximate said particular in-point is replaced by said in-  
point adapter associated with said particular in-point.

13. The method of claim 10, wherein said decoded portion of said  
transport stream including said out-frame comprises said out-frame and all  
10 preceding frames, in display order, from said out-frame to a prior I-frame;

in the case of said out-frame comprising a B-frame, defining the  
frame immediately preceding said prior I-frame in transmission order as a  
final first transport stream frame in said transition stream; and

in the case of said out-frame not comprising a B-frame, defining said  
15 out-frame as said final first transport stream frame in said transition  
stream.

14. The method of claim 9, wherein said portion of transport stream  
including said in-frame to be decoded is determined according to the steps  
20 of:

decoding, in display order, said in-frame and all non-I-frames  
following said in-frame up to a next I-frame.

15. The method of claim 9, further comprising the step of indexing each of  
25 said transport stream, said step of indexing comprising the steps of:

parsing a transport layer of said transport stream to identify packets  
associated with at least one of sequence headers, picture headers and  
predefined splicing syntax; and

determining, for each frame in said transport stream, at least one of a  
30 picture number, a picture coding type, a start of frame transport packet  
number, an end of frame transport packet number, a presentation time  
stamp (PTS) and a decode time stamp (DTS).

16. The method of claim 15, wherein said determinations for each frame are stored in a meta file for subsequent use in generating a transition stream.

5

17. In a system for processing transport streams, apparatus for generating a splice point adapter comprising:

a controller, for identifying at least one out-frame within a transport stream, said out-frame representing a last frame of said transport stream to  
10 be included in a spliced transport stream;

a decoder, responsive to said controller, for decoding each identified out-frame, a respective portion of said transport stream including said out-frame; and

an encoder, for re-encoding each decoded portion of said transport  
15 stream to produce a respective out-point adapter, each of said out-point adapters including a predefined terminating out-point condition.

18. The apparatus of claim 17, wherein:

said controller identifies at least one in-frame within said transport  
20 stream, said in-frame representing a first frame of said transport stream to be included in a spliced transport stream;

said decoder decodes, for each identified in-frame, a respective portion of said transport stream including said in-frame; and

said encoder re-encodes each decoded portion of said transport  
25 stream to produce a respective in-point adapter, each of said in-point adapters including an predefined initial in-point condition.

19. The apparatus of claim 17, wherein:

said controller associates each out-point with a respective out-point  
30 adapter, wherein, in the case of a concatenating an additional transport stream to said transport stream at a particular out-point, said decoded

5        said controller associates each in-point with a respective in-point adapter, wherein, in the case of a concatenating said transport stream to an additional transport stream at a particular in-point, said decoded portion of said transport stream proximate said particular in-point is replaced by said in-point adapter associated with said particular in-point.

21. The apparatus of claim 17, wherein said decoded portion of said transport stream including said out-frame comprises said out-frame and all preceding frames, in display order, from said out-frame to a prior I-frame;

20

25

said controller parses a transport layer of said transport stream to identify packets associated with at least one of sequence headers, picture headers and predefined splicing syntax; and

30       said controller determines, for each frame in said transport stream, at  
least one of a picture number, a picture coding type, a start of frame

transport packet number, an end of frame transport packet number, a presentation time stamp (PTS) and a decode time stamp (DTS).

24. The apparatus of claim 23, further comprising:

- 5 a memory, for storing within a meta file said controller determinations for each frame in said transport stream, said meta file intended for subsequent use in generating a transition stream.

10  
15  
20  
25  
30  
35  
40  
45  
50  
55  
60  
65  
70  
75  
80  
85  
90  
95  
100  
105  
110  
115  
120  
125  
130  
135  
140  
145  
150  
155  
160  
165  
170  
175  
180  
185  
190  
195  
200  
205  
210  
215  
220  
225  
230  
235  
240  
245  
250  
255  
260  
265  
270  
275  
280  
285  
290  
295  
300  
305  
310  
315  
320  
325  
330  
335  
340  
345  
350  
355  
360  
365  
370  
375  
380  
385  
390  
395  
400  
405  
410  
415  
420  
425  
430  
435  
440  
445  
450  
455  
460  
465  
470  
475  
480  
485  
490  
495  
500  
505  
510  
515  
520  
525  
530  
535  
540  
545  
550  
555  
560  
565  
570  
575  
580  
585  
590  
595  
600  
605  
610  
615  
620  
625  
630  
635  
640  
645  
650  
655  
660  
665  
670  
675  
680  
685  
690  
695  
700  
705  
710  
715  
720  
725  
730  
735  
740  
745  
750  
755  
760  
765  
770  
775  
780  
785  
790  
795  
800  
805  
810  
815  
820  
825  
830  
835  
840  
845  
850  
855  
860  
865  
870  
875  
880  
885  
890  
895  
900  
905  
910  
915  
920  
925  
930  
935  
940  
945  
950  
955  
960  
965  
970  
975  
980  
985  
990  
995

## Abstract of the Disclosure

5

110 / 12

120 125

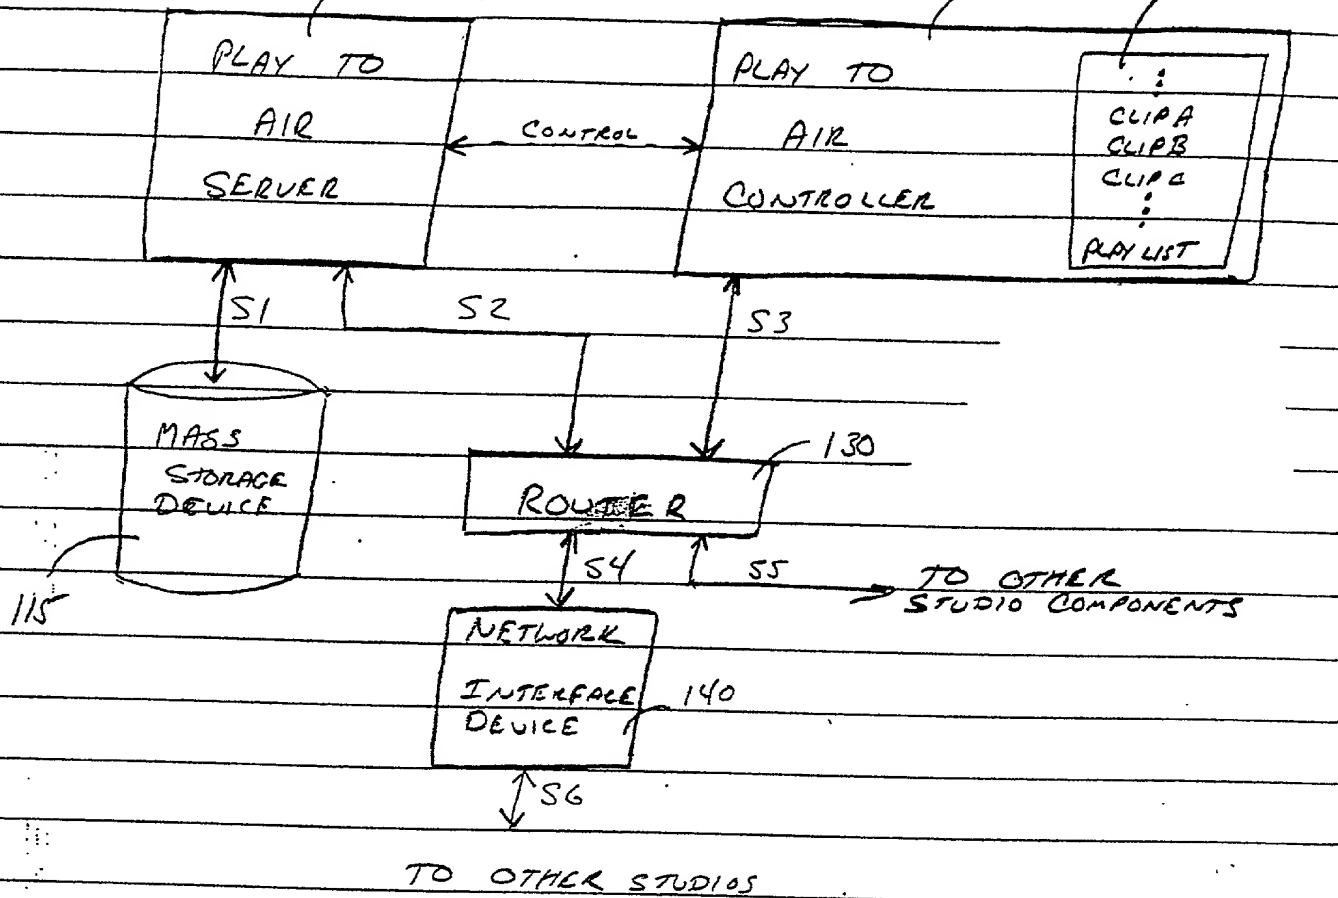


FIG. 1

2/12

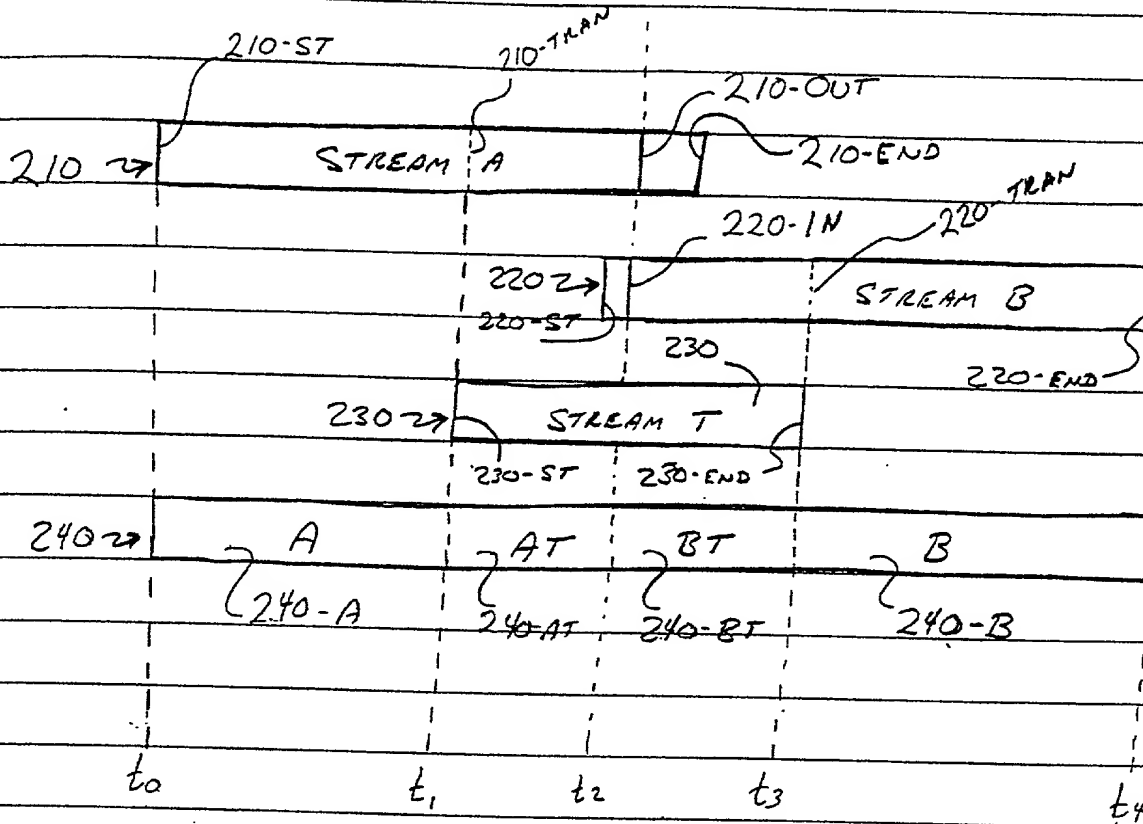


FIG. 2A

(SAMPLE TIME CODES)

STREAM A	00:00:00:00	< t <sub>2</sub>	00:00:02:13	N/A	N/A
STREAM B	N/A	N/A	00:00:00:23	> t <sub>2</sub>	00:00:
RESULTANT	00:00:00:00	< t <sub>2</sub>	00:00:02:13	> t <sub>2</sub>	00:00:
	t <sub>0</sub>	t <sub>1</sub>	t <sub>2</sub>	t <sub>3</sub>	t <sub>4</sub>

FIG. 2B

3/12


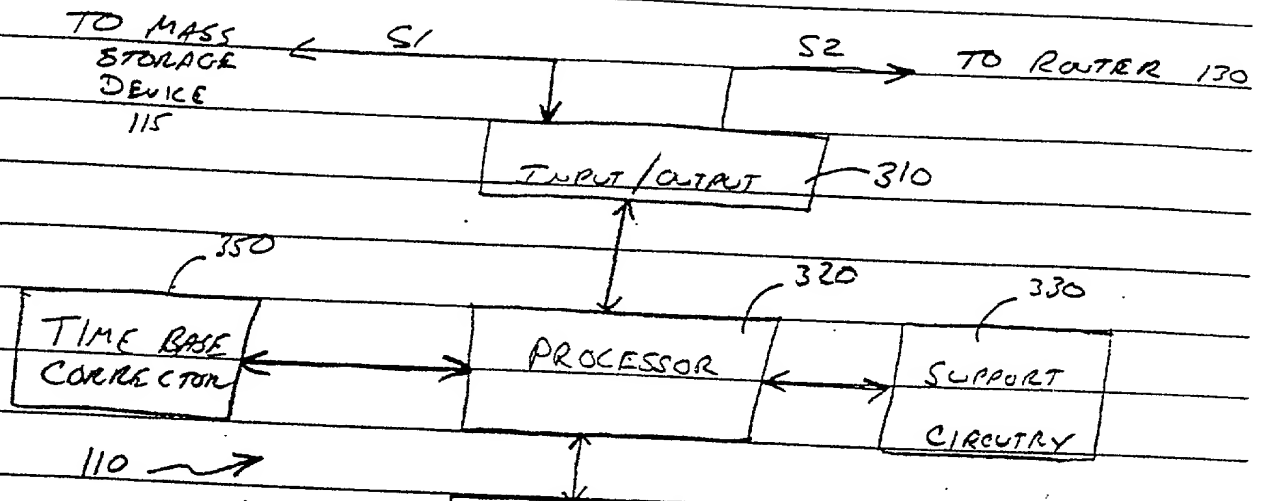


FIG. 3



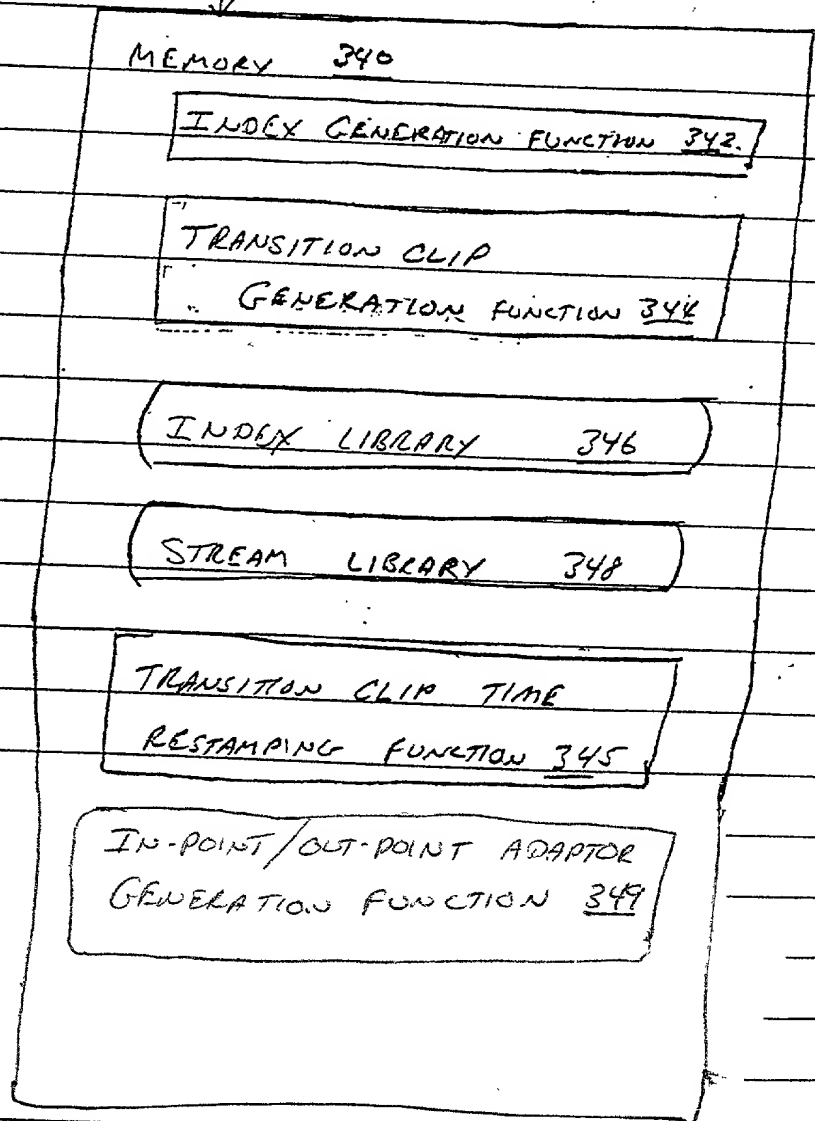

4/12


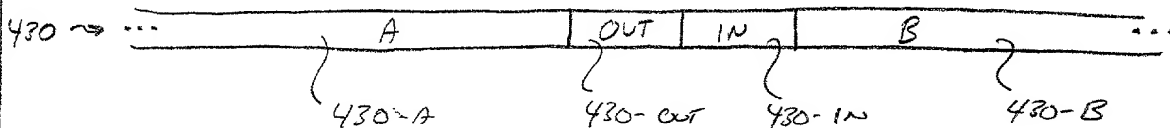


FIG. 4

655201-430660

22-141 50 SHEETS  
22-142 100 SHEETS  
22-144 200 SHEETS

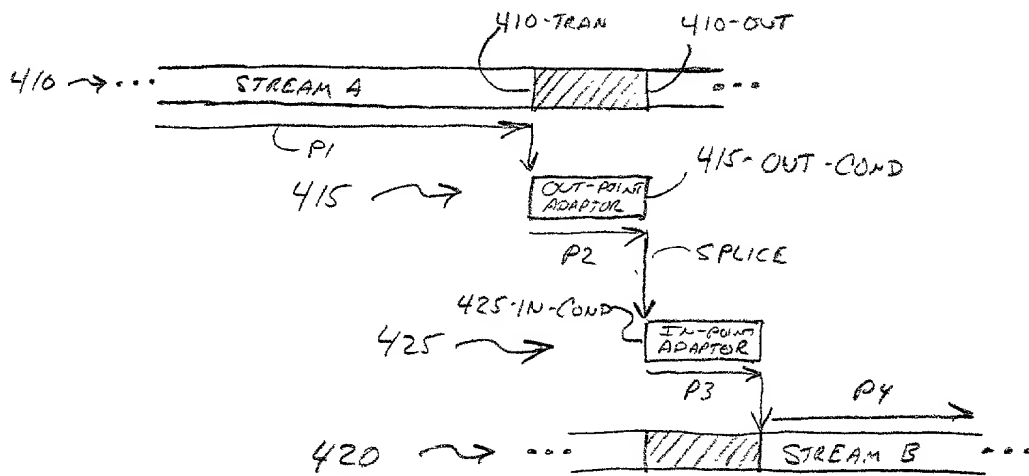

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100
1	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100




FIG. 5

6/12

611

begin decoding here

stop decoding here

613

610 → I B B P B B P B B I B B P B B P B B I B B P B B I B  
1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26

entry frame

612

entry frame

enter stream here

623

620 → I P B B P B B I B B P B B P B B I B B P B B I B B P  
1 4 2 3 7 5 6 10 8 9 13 11 12 16 14 15 19 17 18 22 20 21 25 23 24 28

next I frame  
(display order)

622

FIG. 6

7/12

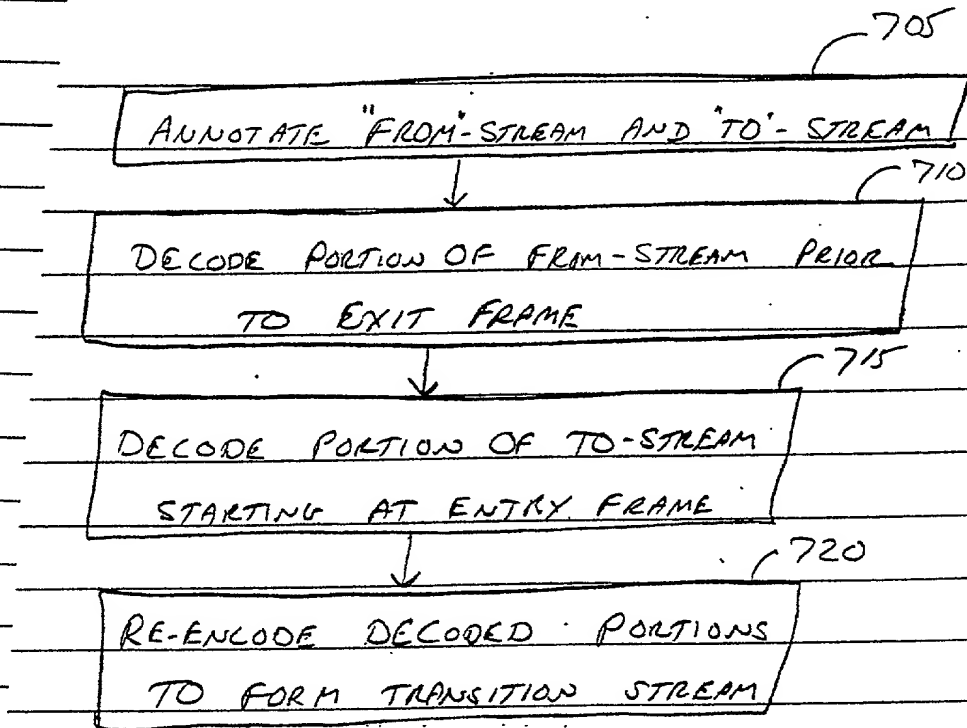


FIG. 7

8/2

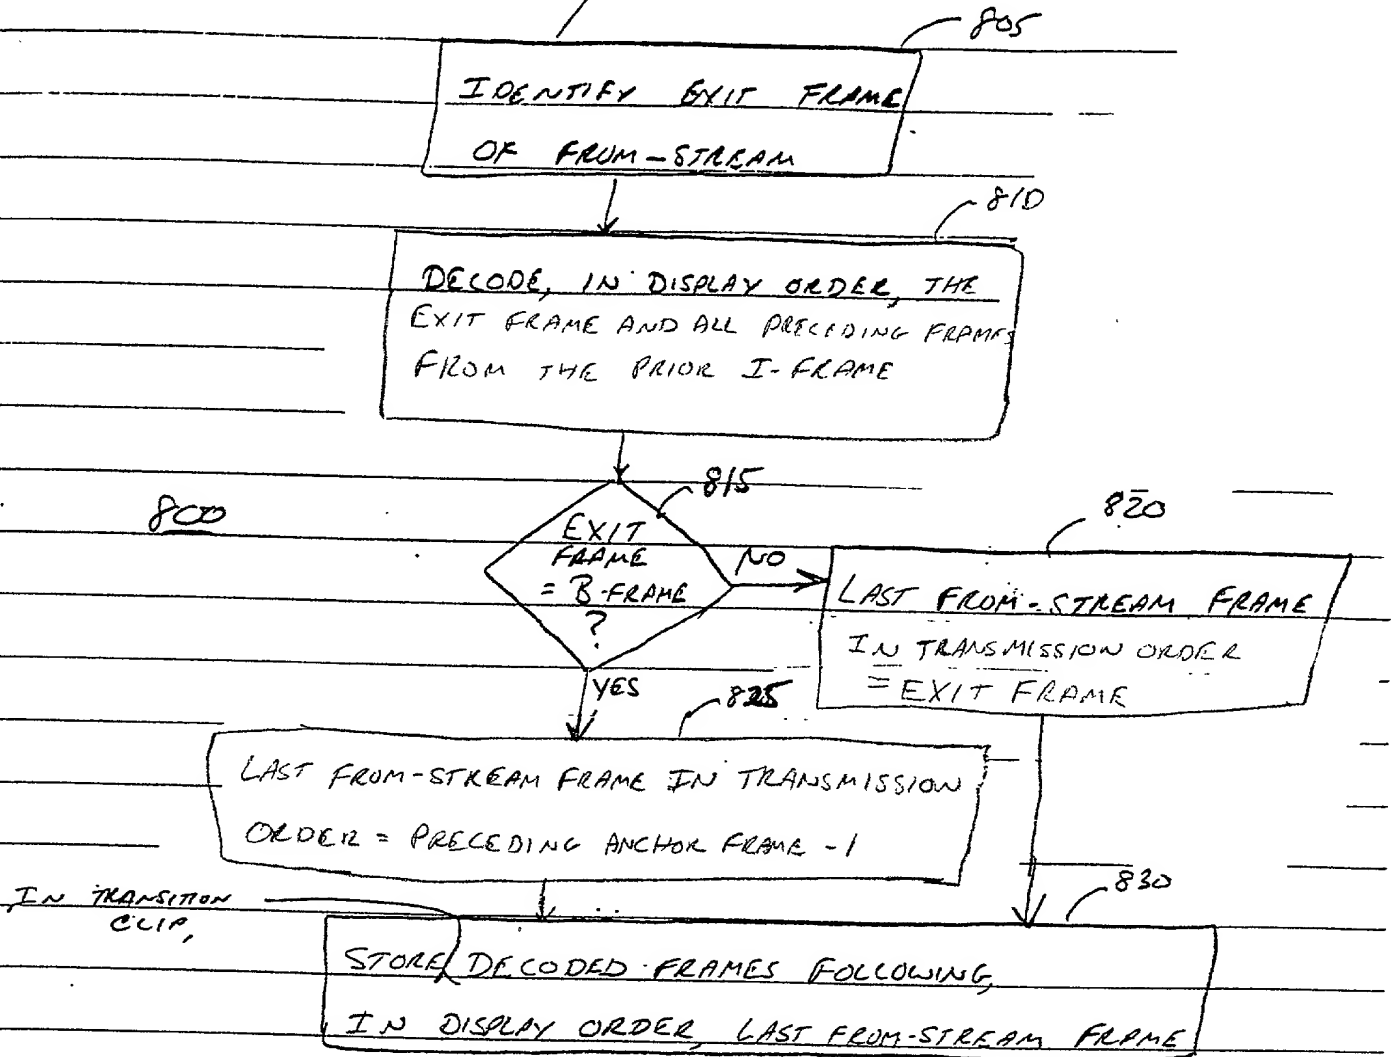


FIG. 8

9/12

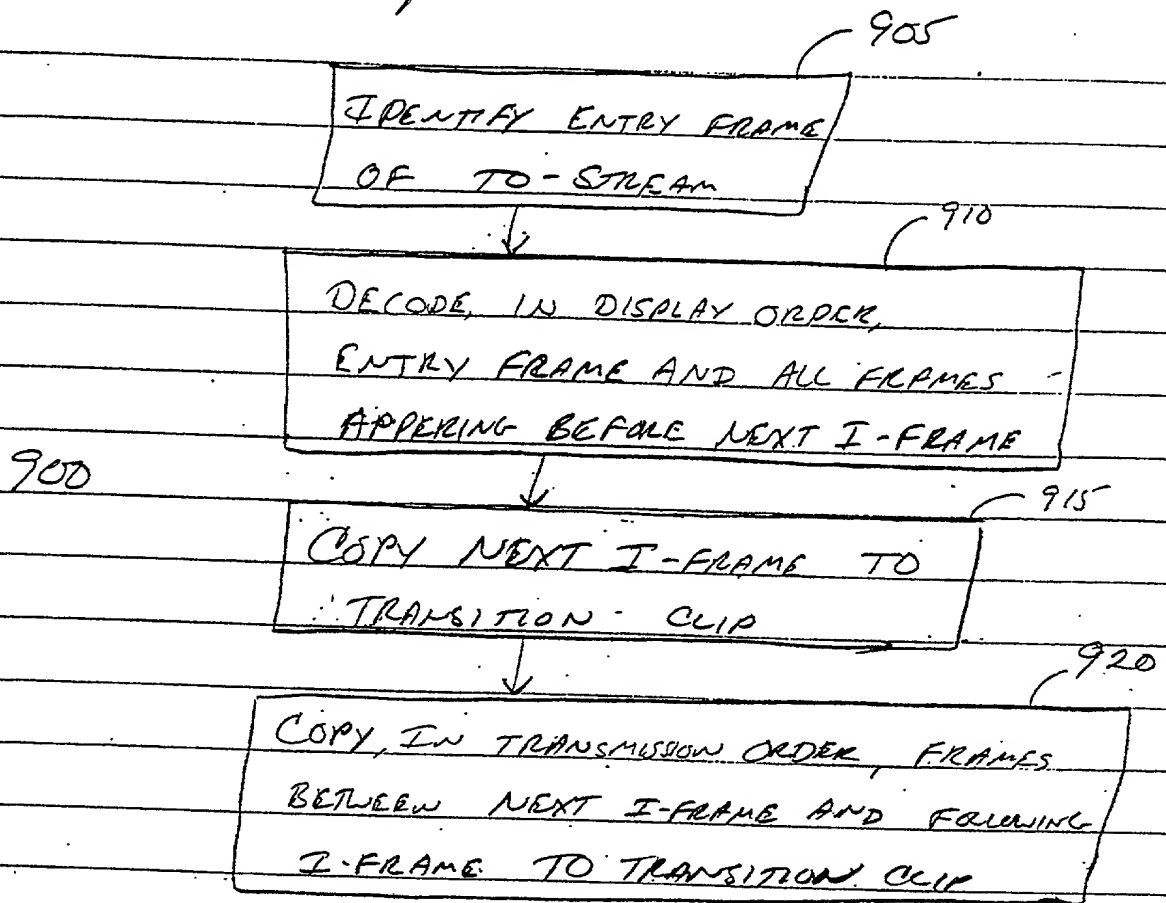


FIG. 9

10/12

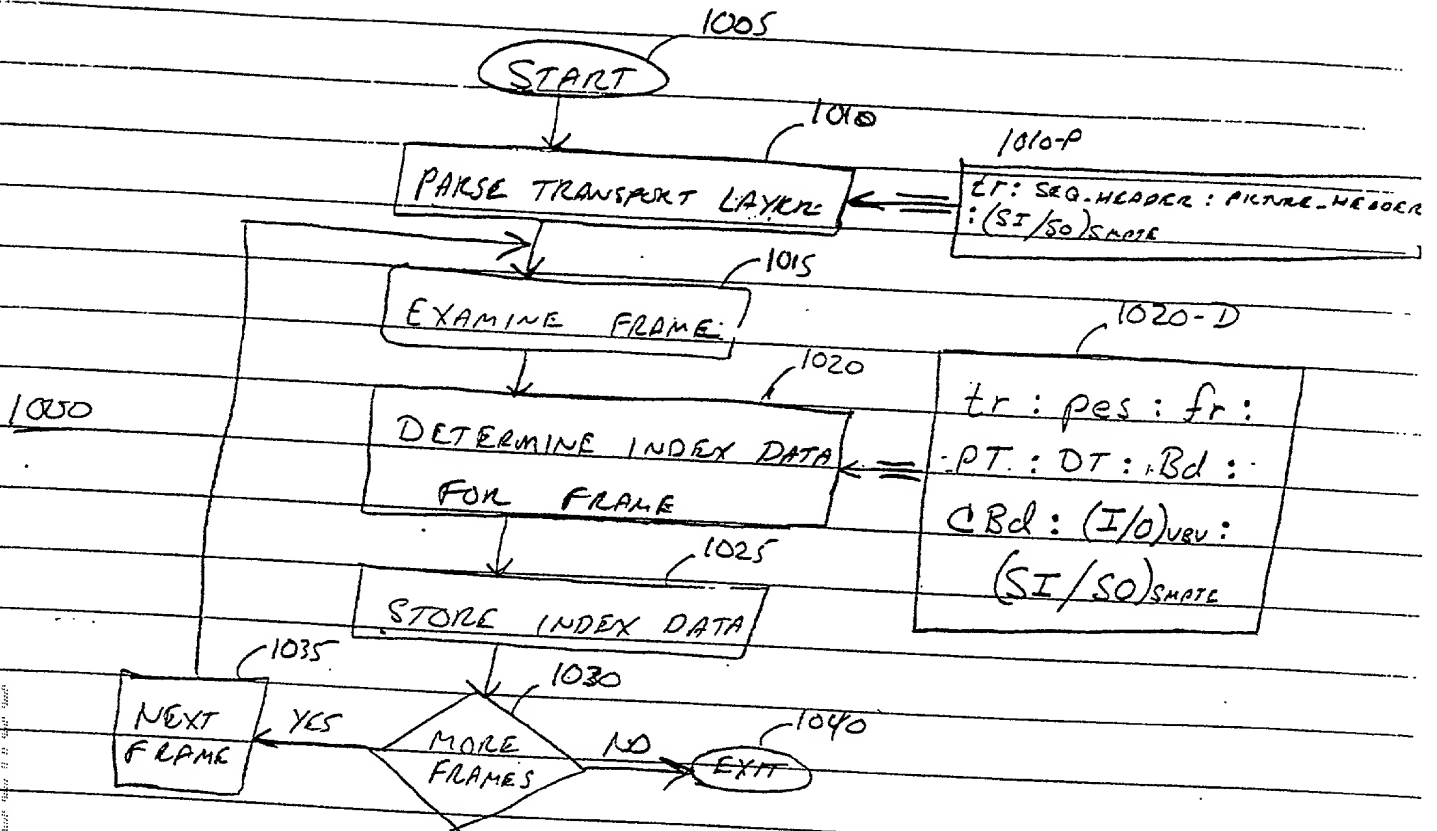


FIG. 10

11/12

1	s:	29	e:	878	fr:	01	PT:	25500	DT:	22500	Bd:	250ms	cBd:	0ms	I	O
2	s:	879	e:	1213	fr:	3P	PT:	34500	DT:	25500	Bd:	217ms	cBd:	217ms		
3	s:	1214	e:	1444	fr:	1B	PT:	28500	DT:	0	Bd:	225ms	cBd:	225ms		
4	s:	1445	e:	1770	fr:	2B	PT:	31500	DT:	0	Bd:	240ms	cBd:	240ms	O	
5	s:	1771	e:	2355	fr:	6P	PT:	43500	DT:	34500	Bd:	248ms	cBd:	248ms		
6	s:	2356	e:	2871	fr:	4B	PT:	37500	DT:	0	Bd:	236ms	cBd:	236ms		
7	s:	2872	e:	3298	fr:	5B	PT:	40500	DT:	0	Bd:	229ms	cBd:	229ms	O	
8	s:	3299	e:	3840	fr:	9P	PT:	52500	DT:	43500	Bd:	230ms	cBd:	230ms		
9	s:	3841	e:	4225	fr:	7B	PT:	46500	DT:	0	Bd:	221ms	cBd:	221ms		
10	s:	4226	e:	4602	fr:	8B	PT:	49500	DT:	0	Bd:	224ms	cBd:	224ms	O	
11	s:	4603	e:	4942	fr:	12P	PT:	61500	DT:	52500	Bd:	228ms	cBd:	228ms		
12	s:	4943	e:	5310	fr:	10B	PT:	55500	DT:	0	Bd:	235ms	cBd:	235ms		
13	s:	5311	e:	5678	fr:	11B	PT:	58500	DT:	0	Bd:	240ms	cBd:	240ms	O	
14	s:	5679	e:	6497	fr:	13I	PT:	64500	DT:	61500	Bd:	245ms	cBd:	245ms	I	O
15	s:	6498	e:	6685	fr:	16P	PT:	73500	DT:	64500	Bd:	215ms	cBd:	215ms		
16	s:	6686	e:	7014	fr:	14B	PT:	67500	DT:	0	Bd:	234ms	cBd:	234ms		
17	s:	7015	e:	7365	fr:	15B	PT:	70500	DT:	0	Bd:	241ms	cBd:	241ms	O	
18	s:	7366	e:	7594	fr:	19P	PT:	82500	DT:	73500	Bd:	248ms	cBd:	248ms		
19	s:	7595	e:	8045	fr:	17B	PT:	76500	DT:	0	Bd:	263ms	cBd:	263ms		
20	s:	8046	e:	8540	fr:	18B	PT:	79500	DT:	0	Bd:	261ms	cBd:	261ms	O	
21	s:	8541	e:	8839	fr:	22P	PT:	91500	DT:	82500	Bd:	256ms	cBd:	256ms		
22	s:	8840	e:	9347	fr:	20B	PT:	85500	DT:	0	Bd:	267ms	cBd:	267ms		
23	s:	9348	e:	9841	fr:	21B	PT:	88500	DT:	0	Bd:	260ms	cBd:	260ms	O	
24	s:	9842	e:	10213	fr:	25P	PT:	100500	DT:	91500	Bd:	256ms	cBd:	256ms		
25	s:	10214	e:	10704	fr:	23B	PT:	94500	DT:	0	Bd:	260ms	cBd:	260ms		
26	s:	10705	e:	11196	fr:	24B	PT:	97500	DT:	0	Bd:	255ms	cBd:	255ms	O	
27	s:	11197	e:	12165	fr:	26I	PT:	103500	DT:	100500	Bd:	250ms	cBd:	250ms	I	O
28	s:	12166	e:	12536	fr:	29P	PT:	112500	DT:	103500	Bd:	208ms	cBd:	208ms		
29	s:	12537	e:	12994	fr:	27B	PT:	106500	DT:	0	Bd:	213ms	cBd:	213ms		
30	s:	12995	e:	13408	fr:	28B	PT:	109500	DT:	0	Bd:	211ms	cBd:	211ms	O	
31	s:	13409	e:	13750	fr:	32P	PT:	121500	DT:	112500	Bd:	212ms	cBd:	212ms		
32	s:	13751	e:	14158	fr:	30B	PT:	115500	DT:	0	Bd:	219ms	cBd:	219ms		
33	s:	14159	e:	14563	fr:	31B	PT:	118500	DT:	0	Bd:	221ms	cBd:	221ms	O	
34	s:	14564	e:	14886	fr:	35P	PT:	130500	DT:	121500	Bd:	222ms	cBd:	222ms		
35	s:	14887	e:	15290	fr:	33B	PT:	124500	DT:	0	Bd:	231ms	cBd:	231ms		
36	s:	15291	e:	15696	fr:	34B	PT:	127500	DT:	0	Bd:	233ms	cBd:	233ms	O	
37	s:	15697	e:	15999	fr:	38P	PT:	139500	DT:	130500	Bd:	234ms	cBd:	234ms		
38	s:	16000	e:	16403	fr:	36B	PT:	133500	DT:	0	Bd:	244ms	cBd:	244ms		
39	s:	16404	e:	16802	fr:	37B	PT:	136500	DT:	0	Bd:	246ms	cBd:	246ms	O	
40	s:	16803	e:	17627	fr:	39I	PT:	142500	DT:	139500	Bd:	249ms	cBd:	249ms	I	O
41	s:	17628	e:	17916	fr:	42P	PT:	151500	DT:	142500	Bd:	218ms	cBd:	218ms		
42	s:	17917	e:	18326	fr:	40B	PT:	145500	DT:	0	Bd:	229ms	cBd:	229ms		
43	s:	18327	e:	18743	fr:	41B	PT:	148500	DT:	0	Bd:	230ms	cBd:	230ms	O	
44	s:	18744	e:	19066	fr:	45P	PT:	160500	DT:	151500	Bd:	231ms	cBd:	231ms		
45	s:	19067	e:	19492	fr:	43B	PT:	154500	DT:	0	Bd:	240ms	cBd:	240ms		
46	s:	19493	e:	19925	fr:	44B	PT:	157500	DT:	0	Bd:	240ms	cBd:	240ms	O	
47	s:	19926	e:	20246	fr:	48P	PT:	169500	DT:	160500	Bd:	240ms	cBd:	240ms		
48	s:	20247	e:	20683	fr:	46B	PT:	163500	DT:	0	Bd:	248ms	cBd:	248ms		
49	s:	20684	e:	21122	fr:	47B	PT:	166500	DT:	0	Bd:	248ms	cBd:	248ms	O	
50	s:	21123	e:	21454	fr:	51P	PT:	178500	DT:	169500	Bd:	247ms	cBd:	247ms		
51	s:	21455	e:	21895	fr:	49B	PT:	172500	DT:	0	Bd:	255ms	cBd:	255ms		
52	s:	21896	e:	22373	fr:	50B	PT:	175500	DT:	0	Bd:	254ms	cBd:	254ms	MO	
53	s:	22375	e:	23078	fr:	52I	PT:	181500	DT:	178500	Bd:	250ms	cBd:	250ms	I	O
54	s:	23079	e:	23416	fr:	55P	PT:	190500	DT:	181500	Bd:	229ms	cBd:	229ms		

← 1100

1110 1120 1130 1140 1150 1160 1170 1180

FIG. 11



12/12

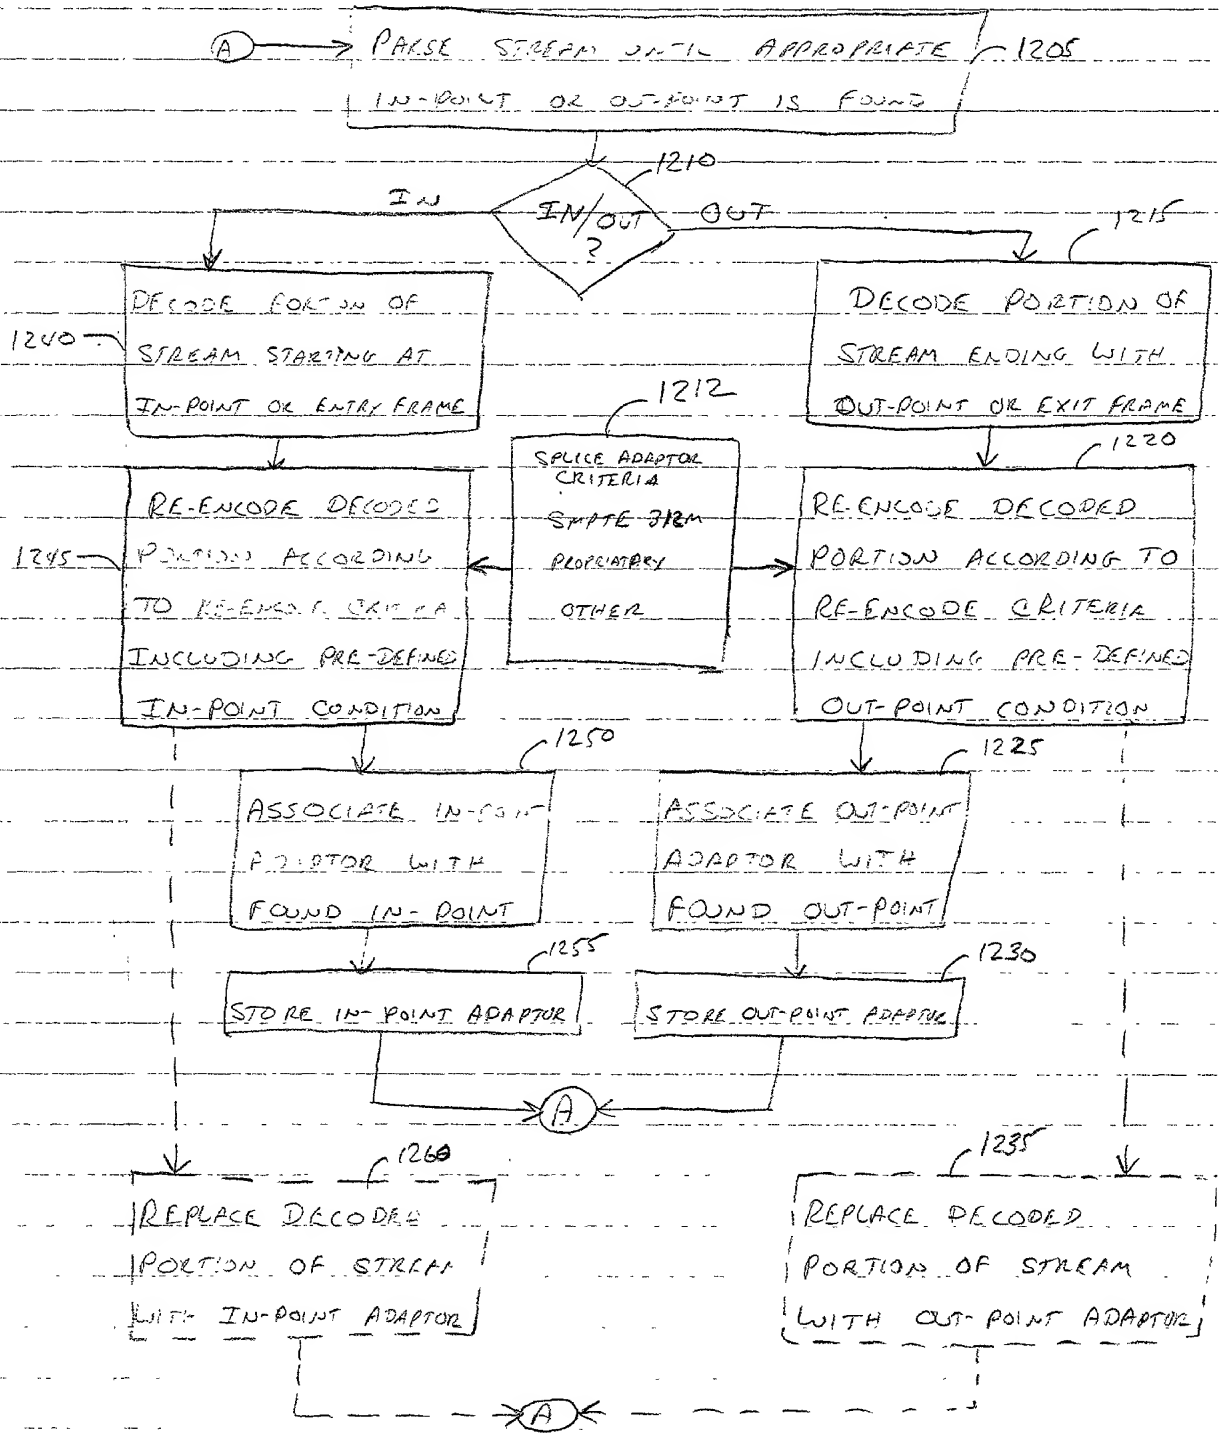


FIG. 12

**COMBINED DECLARATION AND POWER OF ATTORNEY**

As a below-named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first, and sole inventor (if only one name is listed below) or an original, first, and joint inventor (if multiple names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled **FRAME-ACCURATE SEAMLESS SPLICING OF INFORMATION STREAMS**, the specification of which is being filed under the above-identified Attorney Docket Number.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

**PRIORITY CLAIM**

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	____ Yes ____ No (Priority Claimed)
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	____ Yes ____ No (Priority Claimed)

I hereby claim the benefit under Title 35, United States Code § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

<u>09/347.213</u> (Application Serial No.)	<u>2 July 1999</u> (Filing Date)	<u>Pending</u> (Status) (patented, pending, abandoned)
---	-------------------------------------	--

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status) (patented, pending, abandoned)
-----------------------------------	------------------------	---

I hereby claim the benefit under Title 35, United States Code, § 119(e) of any United States provisional application(s) listed below:

**PROVISIONAL APPLICATION NUMBER**  
60/129,276

**FILING DATE**  
14 April 1999

**POWER OF ATTORNEY**

As a named inventor, I hereby appoint the following attorneys jointly and each of them severally, with full power of substitution, delegation, and revocation, to prosecute this application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

William J. Burke, Reg. No. 29,138  
John V. Silverio, Reg. No. 34,014  
Abhik A. Huq, Reg. No. 40,656

I hereby direct that all correspondence and telephone calls in connection with this application be addressed to:


William J. Burke  
Sarnoff Corporation  
c/o Patent Operations  
CN 5300  
Princeton, NJ 08543-5300  
Tel.(609) 734-2560  
Fax.(609) 734-2673

**DECLARATION**

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

**SIGNATURES**

Full name of **first inventor**: Robert Norman Hurst

Inventor's signature: 

Date: 10/25/99 Country of Citizenship: **US**

Residence and Post Office Address: **68 Hart Avenue**

**Hopewell, NJ 08525**